




12 core T.B. 900μ OM3 LC/LC Dca 60m trunk Cable assembly GGM 12TBM3LCLC060

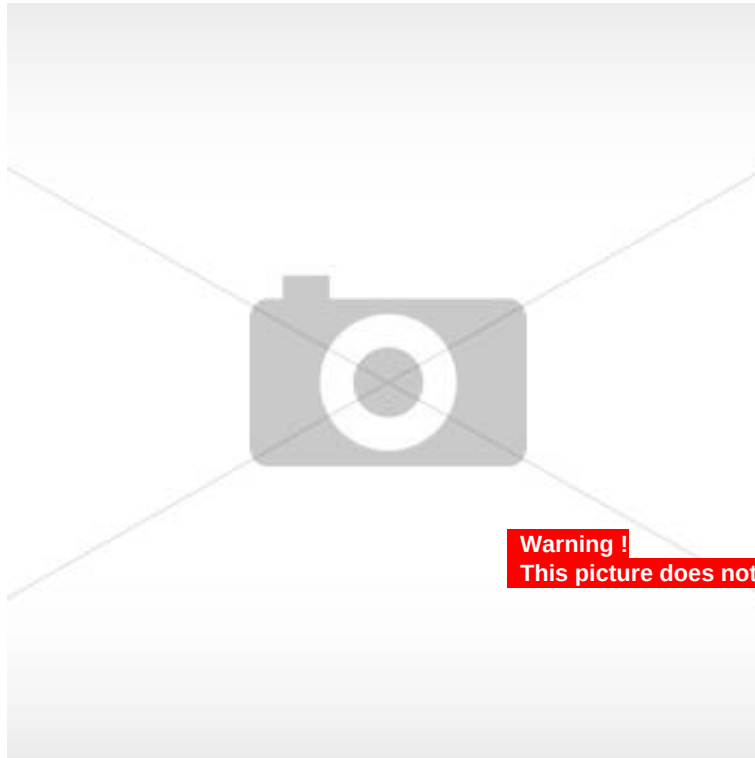

Warning !
This picture does not show the exact color

The Pre Terminated Fiber solution by Gigamedia allows time and cost saving for your link in smart building, industrial, residential or data center market.

Choose our cable assembly solution made in our own workshops is :

- 70% **time saving**
- A **fast delivery**
- A **guarantee of a well connection with the right sustainable connectors**
- Cost **saving** and prices controlled
- A full traceability
- Shortest **installation**
- Test reports **available** online by QR code flashing
- A Des **factory quality connection**
- A "**on demand**" production
- Less **risk on site**
- The **last norms testing** with our high precision machine
- A wide range of **cables and connectors**, including the last Euroclass

- Fixing : Pg13.5 cable gland + lock nut
- Installation : Interior Exterior
- Reinforcement : Glass wick
- Jacket : LSOH
- Cable type : 900 μm Tight buffer
- Fiber type : Multimode OM3