

Mixer Amplifier 100V 350W

4 Mic inputs

2 Aux inputs

100v/4-16Ω out

EMC input


Power 350W



Features

Inputs	
MIC 1, 2, 3, 4	Input:5mV/600Ω unbalanced 6.3 connector
AUX 1, 2	Input:350mV/10KΩ unbalanced RCA connector
EMC	Input:775mV/10KΩ unbalanced 6.3 connector
Outputs	
Types	100V / 4-16 Ω
Power	350 W
RCA OUT	MIX OUT:1000mV/470Ω unbalanced
Tone	
Bass	±10dB at 100Hz
Treble	±10dB at 10KHz
Frequency response	50Hz~16KHz(+1dB,-3dB)
SNR	
MIC 1, 2, 3	66dB
AUX 1, 2	85dB
THD	
	Less than 0.05%(@1KHz, 1/3 rated power)
Mute	
MIC	MIC 1 prior to MIC2-4 AUX1-2 audio input
EMC	EMC prior to all audio input
Channel crosstalk attenuation	
	≥50dB
Cooling	
	Forced fan cooling after side entry, fan start after start, stepless speed change processing
Power supply	
Input	~220-240V /50Hz
Power consumption	500W
Dimension	
	484×295×44mm
Weight	4.7Kg

Back panel

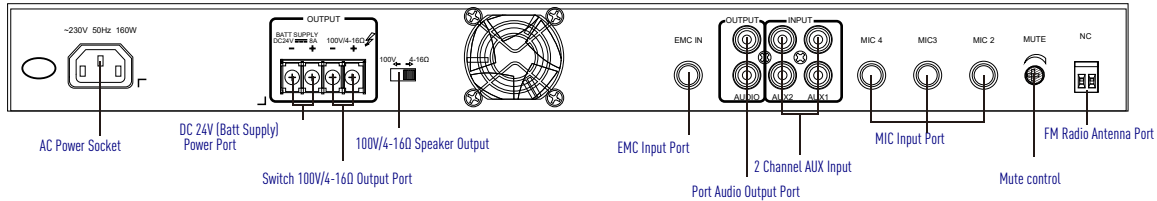

Associated Products

GGM MIC1ZT1	Tabletop microphone 1 zone + chime
GGM PAS3	Audio source mp3 player CD/USB/SD + tuner
GGM PABC56PC	Coaxial ceiling speaker 5" + 1,5" 6 W
GGM PABC610PC	Coaxial ceiling speaker 6" + 1,5" 10 W
GGM PABC815PC	Coaxial ceiling speaker 8" + 1,5" 15 W



TECHNICAL SUPPORT (OUTSIDE FRANCE)

- Technical self-service portal GIGAMEDIA:

<http://support.gigamedia.net>

