


## EXTENDER/REPEATER POE INJECTOR GGM POEINJRM

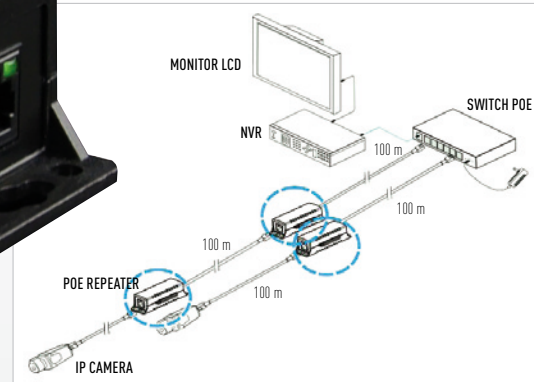

100 Mbps bandwidth

PoE power supply

4 KV surge protection

### MAIN FEATURES

- Real-time extension of the network signal and power extend the distance of more than 100 m, relay cascade farthest reach 300 m
- 0 time delay
- 4 KV surge protection
- Supports IEEE 802.3u 100Base-TX standard and IEEE 802.3af / at PoE standard
- It can be fix with another one, installed like a desktop device or wall-mounted
- Plug and play, no software and protocol conversion

### PRODUCT SPECIFICATIONS

#### POWER

**Power supply PoE**  
**Consumption** <3 W

#### NETWORK PORT

**Port** 100 Mbps PoE in port  
100 Mbps PoE output port  
**Transmission distance** 400 m max  
**Media** CAT5e / CAT6  
**PoE standard** IEEE802.3af & IEEE802.3at  
**PoE power supply** Media-span and End-span

#### ETHERNET EXCHANGE

**Standard** IEEE802.3u 100Base-Tx  
**Delay** <20 ms

#### STATUS (INDICATOR LED)

**Yellow LED** PoE IN/OUT port  
**Green LED** Indicate PoE status  
Indicate working status

#### PROTECTION

**ESD** 1a contact discharge level III  
1b air discharge level III  
Per: IEC61000-4-2  
**Surge protection** Per: IEC61000-4-5 level III

#### ENVIRONMENT

**Temperature** Working: -10 °C to 55 °C  
Storage: -40 °C to 85 °C  
**Humidity** 0-95%

#### PROPERTIES MECHANICAL

**Material** ABS  
**Color** Black

#### DIMENSION

**LxWxH** 113 x 45,5 x 29 mm

#### WEIGHT

58 g

#### WARRANTY

1 year