




GGM 8TBM4LCLC150

8 core T.B. 900µ OM4 LC/LC Dca 150m trunk cable assembly

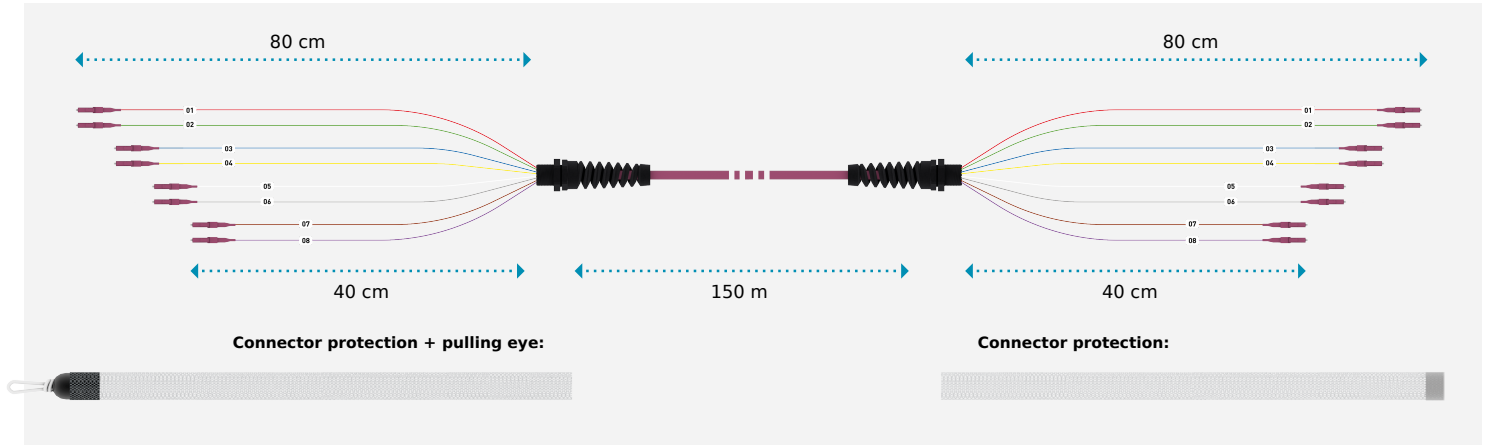

END A (pulling eye)

Connector:	LC
Breakout length:	
Min. (last fiber):	40 cm
Max. (fiber N°1):	80 cm
Connectors' staggering:	by 2

Connector performances

Max. I.L.:	0,25 dB
Typical I.L.:	0,15 dB
Return loss (R.L.):	>30dB

Connector protection

Pulling eye:	Ø 28 mm / (transparent PVC)
+ Spiraled cable gland	
Tensile strength:	700 N
Fastening type:	PG13,5 spiraled cable gland

END B

Connector:	LC
Breakout length:	
Min. (last fiber):	40 cm
Max. (fiber N°1):	80 cm
Connectors' staggering:	by 2

Connector performances

Max. I.L.:	0,25 dB
Typical I.L.:	0,15 dB
Return loss (R.L.):	>30dB

Connector protection

Pulling eye:	Ø 28 mm / (transparent PVC)
+ Spiraled cable gland	
Fastening type:	PG13,5 spiraled cable gland

CABLE

Part number:	GGM F08BOM4ST
Description:	8 FO OM4 TB IN/OUT LSZH DCA
Strength member:	Glass yarns protection against rodent
Sheath:	LSZH
sheath color:	Violet (lilas)
Euroclass / fire behaviour:	Dca
Cable datasheet:	Link
DOP cable:	N/A

PRODUCT INFO

Trunk weight:	6.6 Kg
Packaging:	Drum
Customs code:	85367000
Packaging dimensions:	486x486x486 mm

