




19" SERVERS FLOOR STANDING CABINET GIGARACK CO LOCATION TYPE 250

GGM ALSC3C42810A

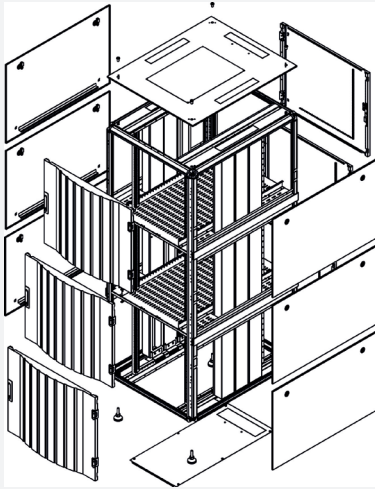

3 Coloc parts
42 U
800 X 1000 mm
Bl



The rigidity and the load capacity of the aluminium frame, the high level of equipment, the finish, the aesthetics ... In brief, a real added value product !

The screwed assembly of the frame allows a complete dismantling of the cabinet, very practical in case of difficult access.

To dissipate the heat it produces, a server needs a supply of fresh air on the front. The heated air will then be exhausted through the back of the server.

To support this cooling process, it is therefore essential that the cabinet be equipped with perforated front and rear doors to allow the circulation of air flows and thus avoid the risk of overheating.

FEATURES

Type :	Colocation server (2, 3 or 4 compartments depending on the version)
Frame :	Aluminum, mechanically screwed (To be disassembled)
Mounting profiles :	Four 19" mounting profiles adjustable in depth (zinc plated), independents by compartment, "U" markings, 9.5 x 9.5 mm perforations
Front door :	Reversible perforated door, can be opened up to 190°, locked by using swing handle with key lock
Rear door :	Reversible perforated door, can be opened up to 190°, locked by using swing handle with key lock
Side panels :	2 x Removable panels per compartment, designed for quick installation and be removable from the outside, locked by using key locks
Roof :	Full, with sides pre-cut for cables entry
Base :	Full, with sides pre-cut for cables entry
Separation plate(s) :	Inter-compartments in perforated sheet metal
Routing ducts :	Sides cables trunking to manage the cables inside the cabinet (serving the compartments independently)
Key set :	Different per compartment
Ground contact :	Adjustable feet (over 4 cm)
Useful height :	2020 mm
Width :	800 mm
Depth (mm) :	1000
RAL :	9005 (Black)
Load capacity :	1500 kg
Earthing kit included :	Yes
Capacity :	3 x 13 units
Type of Use :	Colocation server

PART NUMBER	DESCRIPTION
GGM ALSC3C42810A	19" Serv floor standing cab GIGARACK S250 3 coloc parts 42U 800 x 1000 mm - Bl