




**DIN rail optical metal loaded with 6 SC/ST duplex singlemode grey adapters  
with ceramic sleeve + splice tray**  
**GGM DINFO6STSM**

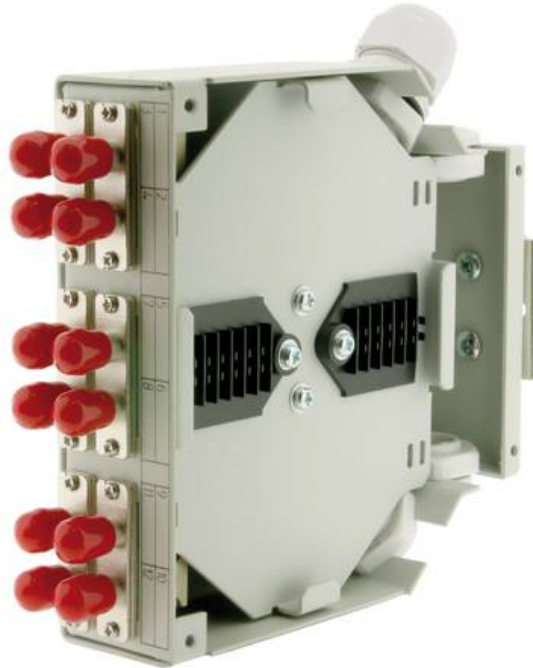

With compact design and easy installation, the GIGAMEDIA DINFO allows up to 12 fibres to be connected. It also allows the mixing of optical and electrical resources inside industrial panels.

**Product features**

- Protection (IP) : IP20
- DIN Rail mounting : Rear or aside
- Cable entries : X 2 AT the rear (cable gland pg 11)
- Fusion splice holder : IntegrATed
- Operating temperature : From -40°C to +70°C
- Dimensions (mm) : 35 x 125 x 133
- Weight (kg) : 0.65
- Colour : Grey
- Supplied accessories : 2 PG 11 cable glands
- Other connectors : On demand

**Article features**

- Unloaded box : For 6 SC duplex
- Color : Grey
- Pre-loaded box : 6 SC to ST duplex singlemode adapters

**ETIM 9 features**

- Duct installation : No
- Floor box/Sub floor mounted : No
- Connection method : DIN rail (top hat rail)
- Connector type : ST/SC-Duplex
- Connector housing : Other
- Material of connector housing : Plastic
- Loaded with adapters : Yes
- Max number of couplers : 6



- Adapted type of fibre : Single mode
- Sleeve material : Metal
- Labeling zone : Yes
- Dust cover : Yes
- IP protection : IP20
- Mechanical coding : No