




DIN RAIL POWER SUPPLY

GGM IAL6048

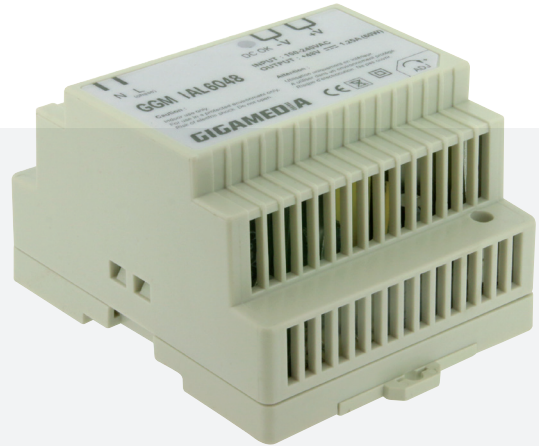

**DIN RAIL Industrial Power Supply 60W
48V**

FEATURES

Voltage type of supply voltage :	AC/DC
1st secondary output voltage :	48 - 52
2nd secondary output voltage :	00 - 00
3rd secondary output voltage :	00 - 00
Max. output current 1 :	1.25 A
Secondary voltage adjustable :	Yes
Short-circuit-proof :	Yes
Rated supply voltage at AC 50 Hz :	00 - 00
Rated supply voltage at AC 60 Hz :	00 - 00
Rated supply voltage at DC :	00 - 00
Output voltage stabilized :	No
Stabilized :	Yes
Type of electric connection :	Screw-/spring clamp connection
Rail mounting possible :	No
Wall mounting possible :	No
Modular version :	Yes
Direct mounting possible :	No
Width :	40 mm
Height :	100 mm
Depth :	90 mm
Suitable for safety functions :	No
SIL according to IEC 61508 :	None
Performance level according to EN ISO 13849-1 :	None
IP protection :	IP30
Degree of protection (NEMA) :	Other

PART-NUMBER

GGM IAL6048

DESCRIPTION

DIN RAIL Industrial Power Supply 60W - 48V