




FTTH simplex singlemode G657A2 SC-SC/APC 15 m subscriber patchcord, Ø 2mm, ivory colour, bend insensitive fiber

GGM JSG657CSCA15M

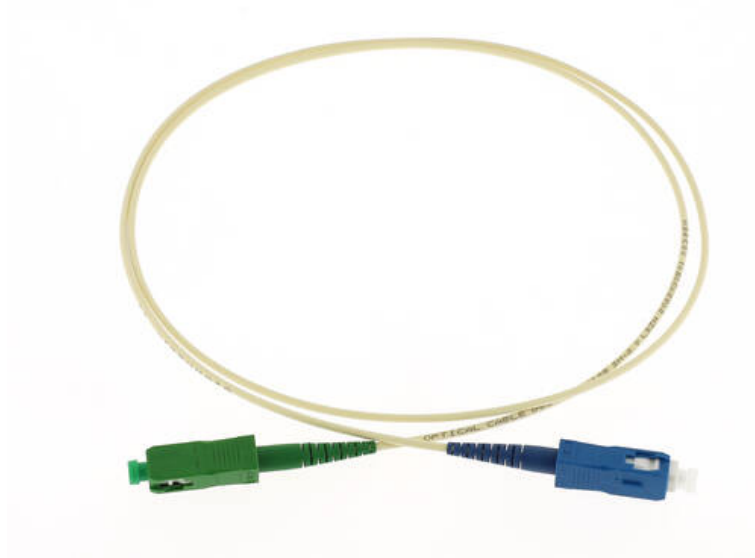

Subscriber patchcords are used to connect the optical terminal outlet to the ISP's router.

Product features

- Cord type : Simplex
- Fiber type : Singlemode G657A2
- Reinforcement : Aramid yarns
- Outersheath diameter : 2
- Sheath type : LSZH
- Jacket color : Ivory
- Il/rl test report : Supplied with each piece
- Insertion loss : $\leq 0.15\text{db}$
- Mating cycles : 1000 (0.2 db change)
- Operating temperature : From - 5°C to + 60°C

Article features

- Polishing type : UPC
- Typical return loss : $> 55\text{ dB SC/UPC}$; $> 65\text{ dB SC/APC}$

ETIM 9 features

- Fibre optic category : Single mode
- Fibre count : 1
- Outer diameter sheath single fibre : 2 mm
- Shield type : Simplex
- Length : 15 m
- Connector A : SC
- Connector B : SC
- APC-version connection 1 : No
- APC-version connection 2 : Yes
- Jacket colour : White
- Boot : Put-on
- Halogen free according to EN IEC 60754-1 : Yes