




PLC MINI SPLITTER

GGM MINIPLC1X32

1 SC/APC 900 μ m fiber
x 32 SC/APC 900 μ m fibers G657
mini splitter
1 m

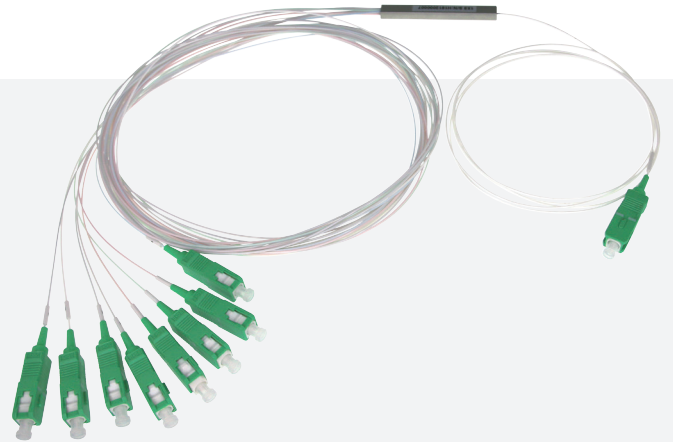

This PLC mini splitter allows the fibre optic signal to be returned to 32 fibre optic cables. Delivered pre-connected (SC/APC connectors) in order to guarantee a high performance level and save time on site.

FEATURES

Wavelength (nm) :	1260-1650nm
Fiber type :	G657A singlemode with small bending radius
Fiber length (m) :	1
Jacket :	900 μ m
Type :	1x32
Operating wavelength :	1260 - 1650
Mounting method :	Splice cassette
Connector type input :	SC/APC
Connector type output :	SC/APC
Max. insertion loss :	17.1 dB
Min. return loss :	55 dB
Max. uniformity loss :	1.5 dB
Max. PDL :	0.3 dB
Min. directivity :	55 dB
Operation temperature :	-40 - 85
Fibre length input :	1000 mm
Fibre length output :	1000 mm
Height :	6 mm
Width :	20 mm
Depth :	80 mm

PART NUMBER	DESCRIPTION
GGM MINIPLC1X32	1 SC/APC 900 μ m fiber x 32 SC/APC 900 μ m fibers G657 mini splitter, 1 m