

POWER AMPLIFIER 1 CHANNEL GGM PAP1240 & GGM PAP1350




This range of power amplifiers are designed for general commercial and industrial public address applications. Rack mount design in 2U or 3U type, rated power ranges from 240 W and 350 W which provides a wide selection to meet different size sound system needs. Both balanced and unbalanced line inputs make it selectable for installer, balanced line output feeds to another power amplifier as well as secures the signal transmission is less noise and longer distance. 70 V, 100 V and 4-16 Ω speaker outputs are convenient for installation when selection different speaker matching. A master volume control is included. Complete protection includes clip, short circuit, high temp and overload. Indications for power, signal, clip, protection and temp.

MAIN FEATURES

- Rack mount amplifier in 2U/3U type
- Rated power from 240 W to 350 W
- 70 V, 100 V and 4-16 Ω speaker outputs
- Isolated transformer for human safety operation
- Balanced XLR type line input and unbalanced 1/4 inch TRS phone jack line input
- Balanced XLR type line output feeds to another power amplifier
- Reliable protection of over heat, over load, clip & short circuit
- Indications for power, signal, clip, protection and temp
- Excellent device of radiator cooling fanner that ensures working effectively
- GND/lift switch to have two options: earth line grounded or lifted

| MODEL | GGM PAP1240 | GGM PAP1350 |
|--------------------------------|--|----------------|
| Rated power output | 240 W | 350 W |
| Speaker outputs | 70 V, 100 V & 4~16 Ω | |
| Input sensitivity & impedance | ± 385 mV / 20 k Ω , balanced XLR input 775 mV / 10 k Ω , unbalanced TRS input | |
| Output sensitivity & impedance | ± 385 mV / 470 Ω , balanced XLR input 775 mV / 470 Ω , unbalanced TRS input | |
| Overload electromotive force | >15 dB | |
| Frequency | 50 Hz~16 kHz (+1 dB, -3 dB) | |
| S/N ratio | >90 dB | |
| THD | Less than 1 % a 1 kHz, 1/3 rated power | |
| Cooling | Fan automatically startup when temp reaches 55 °C | |
| Protection | High temp, overload & short-circuit | |
| Alimentation électrique | ~110 V / 60 Hz ou ~230 V / 50 Hz ou DC 24 V | |
| Consommation | 400 W | 500 W |
| Poids | 13,2 kg | 16 kg |
| Dimension | 484x335x88 mm | 484x385x132 mm |
| Finish | Panel: aluminum plate, black Case: steel plate, black | |

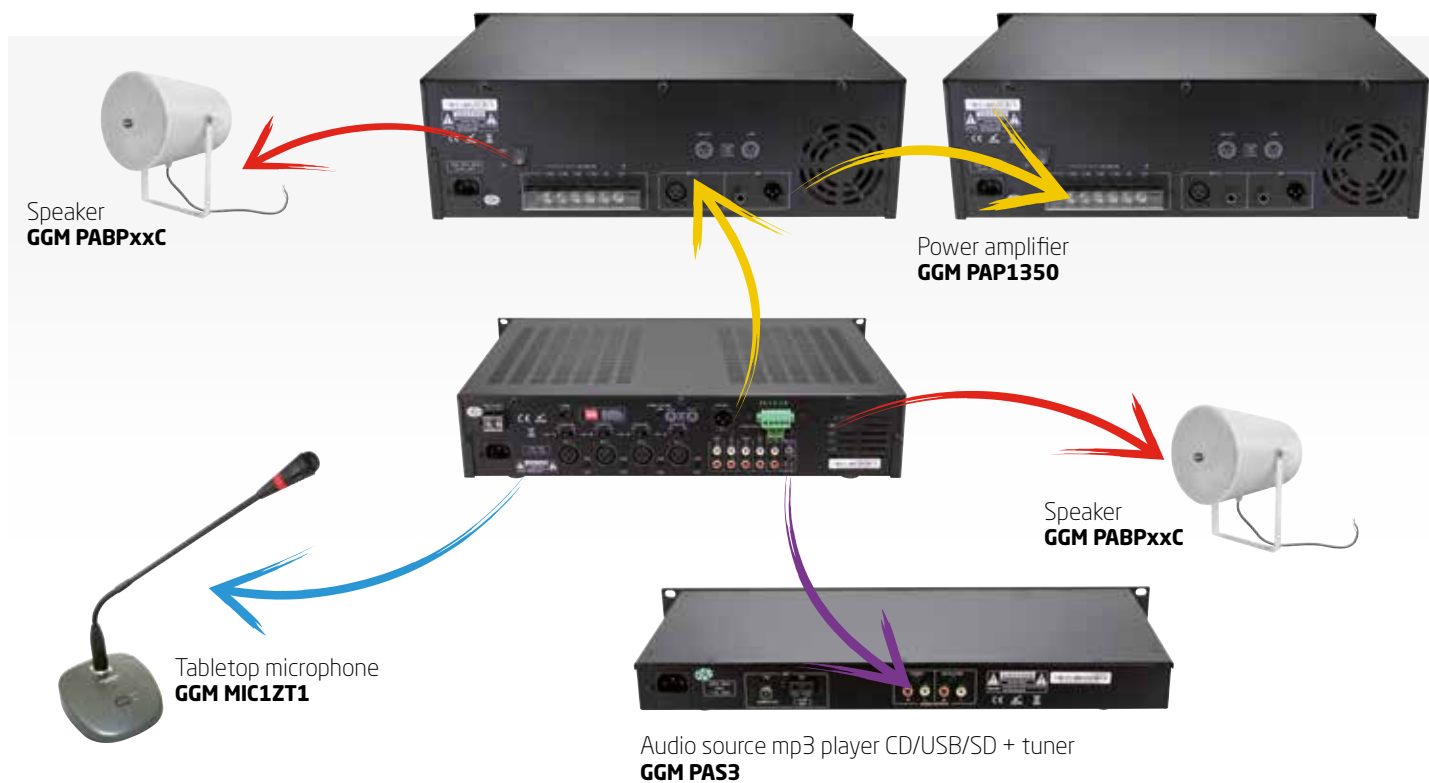

- Yellow: XLR male / XLR female cord
- Blue: Jack cord 6,35 / XLR male
- Purple: RCA / RCA cord
- Red: Cable 2x1,5 mm²