




PLC MINI SPLITTER

GGM SPLITBF1X4

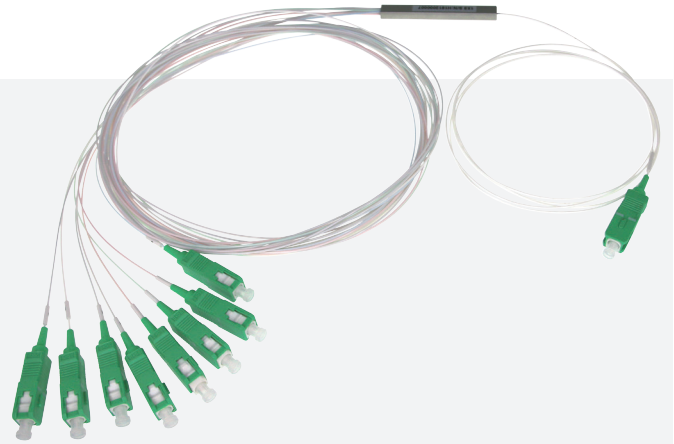

*Mini PLC splitter G657A2 9/125 singlemode
1 x 4 fibers with 250µm bare fibers*

The PLC mini splitters allow the fibre optic signal to be sent back to up to 32 fibres They are delivered bare, in 250 µm.

FEATURES

Wavelength (nm) :	1260-1650nm
Fiber type :	G657A singlemode with small bending radius
Fiber length (m) :	1
Jacket :	250 µm
Type :	1x4
Operating wavelength :	1260 - 1650
Mounting method :	482.6 mm (19 inch) mounting rack
Connector type input :	SC/APC
Connector type output :	SC/APC
Max. insertion loss :	7.2 dB
Min. return loss :	55 dB
Max. uniformity loss :	0.6 dB
Max. PDL :	0.2 dB
Min. directivity :	55 dB
Operation temperature :	-40 - 85
Fibre length input :	1000 mm
Fibre length output :	1000 mm
Height :	10 mm
Width :	100 mm
Depth :	80 mm

PART NUMBER	DESCRIPTION
GGM SPLITBF1X4	Mini PLC splitter G657A2 9/125 singlemode 1 x 4 fibers with 250µm bare fibers