




Preloaded 1U black patchpanel with 6 ST simplex OM1/OM2 metal adapters with ceramic ferule + spooling accessories, splice management support, PG13,5 Cable gland

GGM TIRRA6ST62

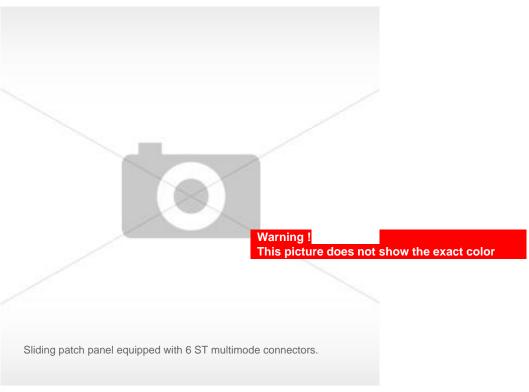

Product features

- Cable entries: 2x20mm + 4x10mm
- Depth (mm): 200 • Height (mm): 44 • Number of ports: 24
- Port identification : Numbering and marking space available on the front
- Quick installation : Opening up to 45° for easy handling
- Supplied accessories: Splice tray, 2 cable glands (PG 13.5), bunny clips

Article features

- Accessories included: 1 cable gland (PG 13.5), 1 splice management kit for 24 fusion splices, 8 bunny clips
- Width (mm): 483 • Weight (kg): 2.6

ETIM 9 features

- Number of connections: 24
- Number of slots : 6
- With front plate : Yes
- With housing : Yes
- · With pigtails: No
- Fibre optic category : Multi mode 62.5/125
- Fibre type : OM1
- APC : No
- Outer connector : ST • Inner connector : ST
- Colour : Black • RAL: 9005
- Mounting method: 482.6 mm (19 inch) mounting











Height (U): 1Height: 44 mmWidth: 483 mmDepth: 200 mm