




## GGM FCSRG174UST

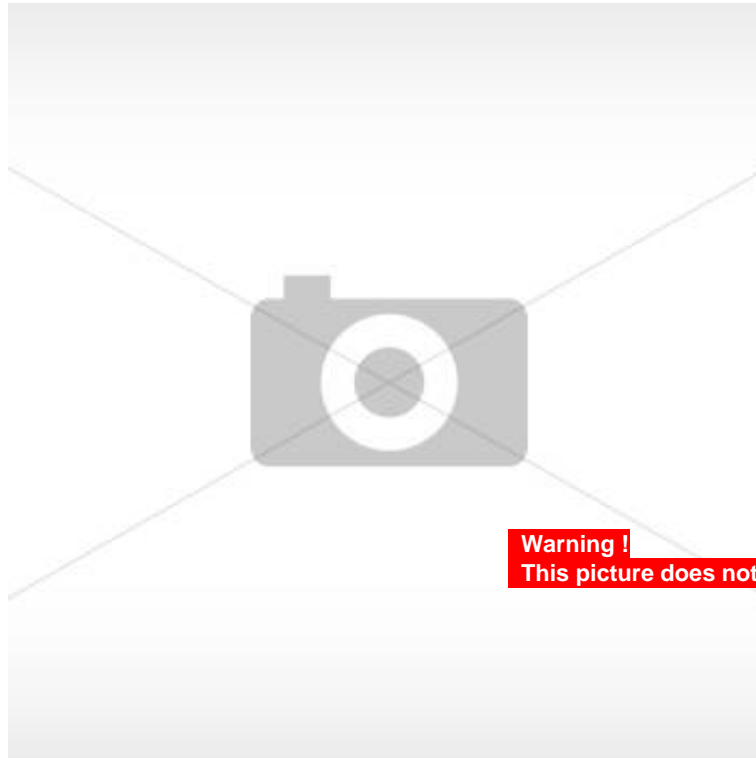

**Warning !**  
This picture does not show the exact color

### Article features

- Shield : Braid cca - 85%
- Packaging : On cut
- Outer jacket colour : Black
- Outer sheath diameter (mm) : 3
- Insulation diameter (mm) : 1.55
- Impedance (ohms) : 50
- Jacket type : PVC
- NVP (%) : 66
- Bending radius (mm) : 7x2,9
- Conductors size : 0,75 mm<sup>2</sup>
- Braid coverage rate (%) : 94
- Conductor type : Bare copper

### ETIM 10 features

- Paired co-axial cable : No
- 2 core co-axial cable (twinax) : No
- Diameter inner conductor : 0.48 mm
- Inner conductor material : Copper
- Inner conductor surface : Copper-plated
- Inner conductor category : Class 1 = solid
- Outer conductor surface : Copper-plated
- Type of outer conductor : Braiding
- Dielectric : Solid PE (HD-PE)
- Armouring/reinforcement : None
- With rodent protection : No
- Material outer sheath : Polyvinyl chloride (PVC)
- Colour outer sheath : Black
- Flame retardant according to IEC 60332-1-2 : No
- Flame retardant according to IEC 60332-3-21 (Cat A F/R) : No



- Flame retardant according to IEC 60332-3-22 (Cat A) : No
- Flame retardant according to IEC 60332-3-23 (Cat B) : No
- Flame retardant according to IEC 60332-3-24 (Cat C) : No
- Flame retardant according to IEC 60332-3-25 (Cat D) : No
- Low smoke according to EN IEC 61034-2 : No
- Halogen free according to EN IEC 60754-1 : No
- Halogen free according to EN IEC 60754-2 : No
- Halogen free according to EN IEC 60754-3 : No
- Reaction-to-fire according to EN 13501-6: Class : Eca
- Reaction-to-fire according to EN 13501-6: Smoke production : None
- Reaction-to-fire according to EN 13501-6: Flaming droplets/particles : None
- Reaction-to-fire according to EN 13501-6: Acidity : None
- Characteristic impedance : 50 Ohm
- Outer diameter approximate : 2.9 mm
- Suitable for underground installation : No
- Approved type of underground installation : Underground installation tube
- Permitted cable outer temperature during assembling/handling : -20 - 70
- Permitted cable outer temperature after assembling without vibration : -20 - 70