




## 1U empty and sliding patchpanel for 12 ST simplex adapters, black colour + spooling accessories

**GGM GMTO12N**

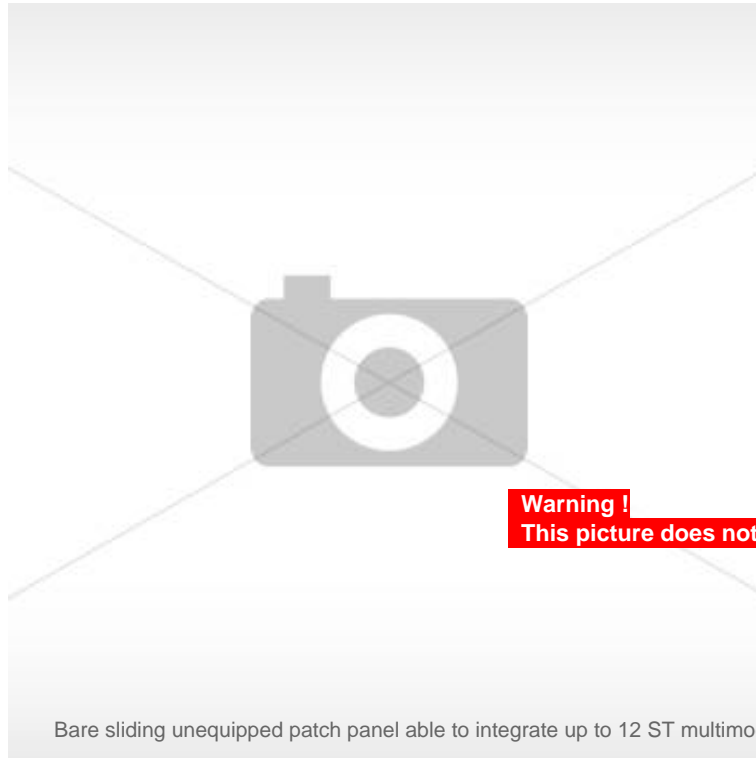

**Warning !**  
This picture does not show the exact color

Bare sliding unequipped patch panel able to integrate up to 12 ST multimode or monomode connectors.

### Product features

- Capacity : 12 to 48 fibers
- Port identification : Front numbering
- Number of cable entries : 6 x cable entries at the rear (2x 24 mm ; 2x 22 mm ; 2x 20 mm)
- Opening of the tray : 45°
- Fixing brackets : Adjustable depth
- Width (mm) : 483
- Depth (mm) : 225
- Height (mm) : 44
- Weight (kg) : 2.3
- Colour : Black
- Supplied accessories : 2 PG 13.5 cable glands, 6 coiling clips, 6 cable ties
- Optional accessory : SC simplex blanking plug (GGM OBTUSCSPLEX)

### Article features

- Port density : 12

### ETIM 10 features

- Suitable for number of couplings/adaptors : 24
- With number of couplings/adaptors : 12
- With front plate : Yes
- With housing : Yes
- With pigtailed : No
- Fibre type : Singlemode and Multimode 50/125
- Type of connector external : ST
- Type of connector interior : FC
- RAL-number : 9005
- Mounting method : 482.6 mm (19 inch) mounting
- Number of height units : 1



- Height : 44 mm
- Width : 483 mm
- Depth : 224 mm