




PLC MINI SPLITTER

GGM MINIPLC1X8

1 SC/APC 900 μ m fiber
x 8 SC/APC 900 μ m fibers G657
mini splitter
1 m

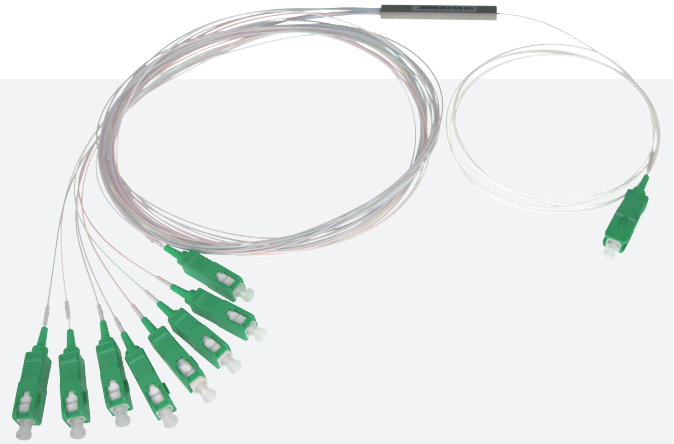

This PLC mini splitter allows the fibre optic signal to be returned to 8 fibre optic cables. Delivered pre-connected (SC/APC connectors) in order to guarantee a high performance level and save time on site.

FEATURES

Wavelength (nm) :	1260-1650nm
Fiber type :	G657A singlemode with small bending radius
Fiber length (m) :	1
Jacket :	900 μ m
Type :	1x8
Operating wavelength :	1260 - 1650
Mounting method :	Splice cassette
Connector type input :	SC/APC
Connector type output :	SC/APC
Max. insertion loss :	10.5 dB
Min. return loss :	55 dB
Max. uniformity loss :	0.8 dB
Max. PDL :	0.3 dB
Min. directivity :	55 dB
Operation temperature :	-40 - 85
Fibre length input :	1000 mm
Fibre length output :	1000 mm
Height :	4 mm
Width :	12 mm
Depth :	60 mm

PART NUMBER	DESCRIPTION
GGM MINIPLC1X8	1 SC/APC 900 μ m fiber x 8 SC/APC 900 μ m fibers G657 mini splitter, 1 m