




VVK MA9322EHTVL

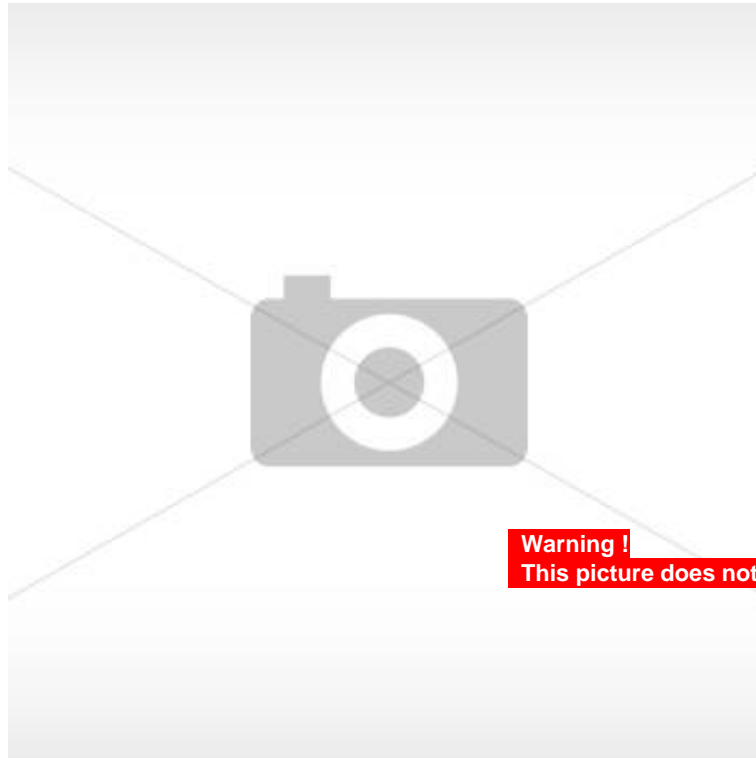

Warning !
This picture does not show the exact color

1. High Quality Unlimited Coverage

Featuring four independent 5MP CMOS Sensors with IR illuminators, the MA9322-EHTVL network camera can provide the most flexibility in surveillance monitoring. Each sensor utilizes a 3.7 to 7.7 mm motorized focus lens and 3-axis design along a circular track to enable full 360° coverage. The MA9322-EHTVL is equipped with a removable IR-cut filter and WDR Pro technology, enabling the camera to maintain optimal image quality and unparalleled visibility in high contrast lighting environments.

2. 360° Extreme Low Light Visibility

By adding IR illumination up to 30 meters, no matter day or night, light or dark, it always provides complete video security. Further, in addition to SNV technology, areas of low light visibility are no longer an issue either.

3. Comprehensive Video Coverage from a Single Mount Point

The MA9322-EHTVL captures every angle for comprehensive video coverage from a single IP address, helping to reduce the amount of cameras needed and saving on installation time and costs.

4. Key Features

- H.265 Compression Technology
- 4x 5MP Independent Sensors, Adjustable Views
- 12 fps @ 2688x1920 per Sensor / 30 fps @ 2560x1440 per Sensor
- WDR Pro (120 dB) for Optimal Image Quality in High Contrast Environments
- SNV (Supreme Night Visibility) for Low Light Conditions
- Built-in IR Illuminators, Effective up to 30 Meters Radius
- Weather-proof IP66-rated, Vandal-proof IK10-rated, NEMA 4X Housing
- Built-in Microphone

Article features

- Built in microphone : Yes
- Infrared lighting distance (m) : 30
- IP Protection : IP66
- Powered with Trend Micro IoT Security : Yes
- Supreme Night Visibility (SNV) : Yes
- Video compression : H.265, H.264 and MJPEG



- Viewing angle (°) : 360
- Vivotek multi-sensors IP Dome Camera : Yes

ETIM 10 features

- Model : Panoramic (multi-sensor)
- Construction type : Other
- Thermal camera : No
- Number of pixels (Megapixel) : 20
- With lens : Yes
- Modular (lens and camera separated) : No
- Focus : Variable
- Focal size : 3,7 - 7,7
- Shutter control : DC
- Lens connection : Other
- Motor zoom : No
- Suitable for wall mounting : No
- Suitable for ceiling mounting : Yes
- Suitable for corner mounting : No
- Suitable for surface mounting : No
- Flush-mounted installation/built-in installation : No
- Suitable for outdoor use : Yes
- Communication medium wired : Yes
- Type of transmission medium : Twisted Pair
- Communication medium wireless : No
- Type of interface : None
- Protocol : TCP/IP
- Power over Ethernet (PoE) : 802.3 at (PoE+)
- Picture system : PAL
- Frame rate : 30 fps
- Property picture system : Colour
- With infrared lighting : Yes
- Max. infrared reach : 30 m
- With white light : No
- WDR (Wide Dynamic Range) : 120 dB
- Number of video streams : 8
- Supports H.264 codec : Yes
- Supports H.265 codec : Yes
- Supports Motion JPEG codec : Yes
- Supports MPEG-4 codec : Yes
- With video motion detector : Yes
- With integrated AI analysis : Yes
- With slot for memory card : Yes
- With memory card : No
- With integrated audio analysis : No
- HDMI-connection : No
- Mini HDMI-connection : No
- VGA-connection (D-Sub 15-pole) : No
- DVI-connection : No
- BNC-connection : No
- DisplayPort-connection : No
- Mini DisplayPort : No
- S-Video-connection : No
- USB-C-connection : No
- Vandal proof : Yes
- Impact strength : IK10
- Degree of protection (IP) : IP66
- Horizontal field of view : 40,1 - 88,6
- Vertical field of view : 28,6 - 61,2
- With microphone : Yes
- With loudspeaker : No
- Power consumption : 25 W
- Supply voltage : 24 - 24
- Voltage type : AC
- Colour : Black
- Ambient temperature : -40 - 50
- Diameter : 275 mm
- Height : 118 mm
- Width : 275 mm



- Depth : 275 mm
- Compatible with Apple HomeKit : No
- Compatible with Google Assistant : No
- Compatible with Amazon Alexa : No
- IFTTT support available : No