




GGM 6TBM4LCLC020

6 core T.B. 900µ OM4 LC/LC Dca 20m trunk cable assembly

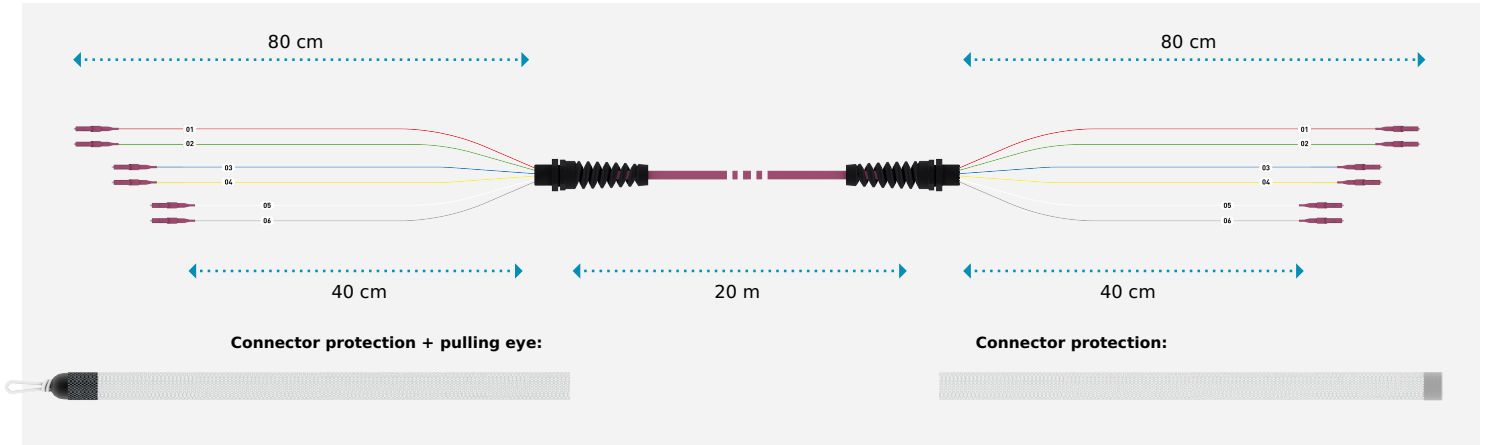

END A (pulling eye)

Connector:	LC	
Breakout length:		
Min. (last fiber):	40 cm	
Max. (fiber N°1):	80 cm	
Connectors' staggering:	par 2	

Connector performances

Max. I.L.:	0.25 dB
Typical I.L.:	0.15 dB
Return loss (R.L.):	>30dB

Connector protection

Pulling eye:	Ø 28 mm / (transparent PVC)
+ Spiraled cable gland	
Tensile strength:	700 N
Fastening type:	Presse-étoupe spiralé PG13,5

END B

Connector:	LC	
Breakout length:		
Min. (last fiber):	40 cm	
Max. (fiber N°1):	80 cm	
Connectors' staggering:	par 2	

Connector performances

Max. I.L.:	0.25 dB
Typical I.L.:	0.15 dB
Return loss (R.L.):	>30dB

Connector protection

Pulling eye:	Ø 28 mm / (transparent PVC)
+ Spiraled cable gland	
Fastening type:	Presse-étoupe spiralé PG13,5

CABLE

Part number:	GGM FO6BOM4ST
Description:	6FO INTEX OM4 TIGHT MDV ZH DCA
Strength member:	glass yarns rodent protection
Sheath:	LSOH
sheath color:	Violet (lilas)
Euroclass / fire behaviour:	Dca
Cable datasheet:	Link
DOP cable:	Link

PRODUCT INFO

Trunk weight:	0.78 Kg
Packaging:	Coil
Customs code:	85367000
Packaging dimensions:	486x486x150 mm

