




## GGM 6TBM4LCLC070

6 core T.B. 900µ OM4 LC/LC Dca 70m trunk cable assembly

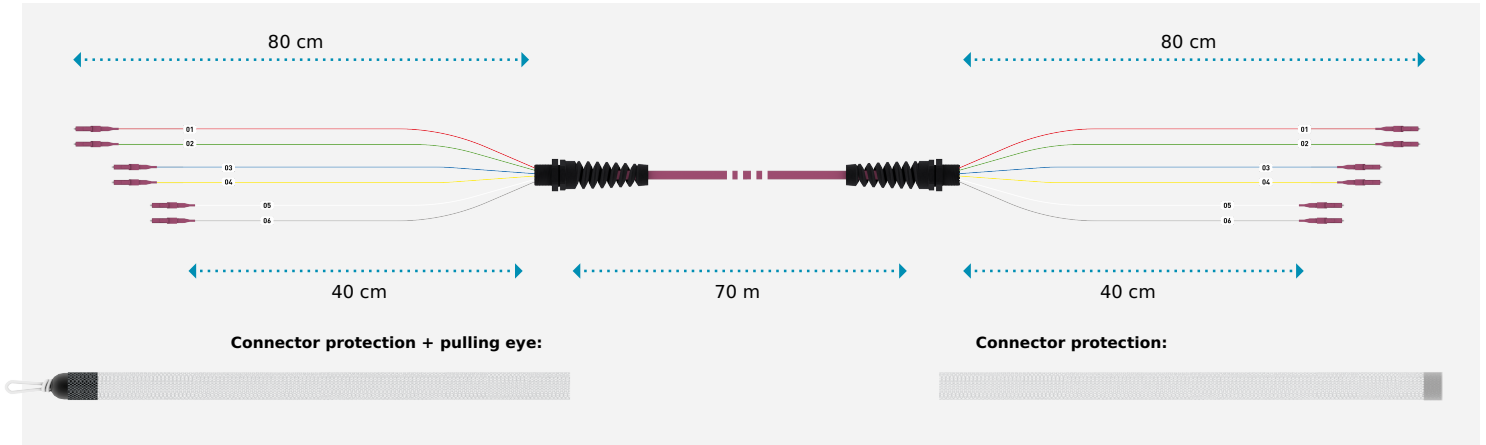

### END A (pulling eye)

<b>Connector:</b>	LC	
<b>Breakout length:</b>		
<b>Min. (last fiber):</b>	40 cm	
<b>Max. (fiber N°1):</b>	80 cm	
<b>Connectors' staggering:</b>	par 2	

#### Connector performances

<b>Max. I.L.:</b>	0.25 dB
<b>Typical I.L.:</b>	0.15 dB
<b>Return loss (R.L.):</b>	>30dB

#### Connector protection

<b>Pulling eye:</b>	Ø 28 mm / (transparent PVC)
<b>+ Spiraled cable gland</b>	
<b>Tensile strength:</b>	700 N
<b>Fastening type:</b>	Presse-étoupe spiralé PG13,5

### END B

<b>Connector:</b>	LC	
<b>Breakout length:</b>		
<b>Min. (last fiber):</b>	40 cm	
<b>Max. (fiber N°1):</b>	80 cm	
<b>Connectors' staggering:</b>	par 2	

#### Connector performances

<b>Max. I.L.:</b>	0.25 dB
<b>Typical I.L.:</b>	0.15 dB
<b>Return loss (R.L.):</b>	>30dB

#### Connector protection

<b>Pulling eye:</b>	Ø 28 mm / (transparent PVC)
<b>+ Spiraled cable gland</b>	
<b>Fastening type:</b>	Presse-étoupe spiralé PG13,5

### CABLE

<b>Part number:</b>	GGM FO6BOM4ST
<b>Description:</b>	6FO INTEX OM4 TIGHT MDV ZH DCA
<b>Strength member:</b>	glass yarns rodent protection
<b>Sheath:</b>	LSOH
<b>sheath color:</b>	Violet (lilas)
<b>Euroclass / fire behaviour:</b>	Dca
<b>Cable datasheet:</b>	<a href="#">Link</a>
<b>DOP cable:</b>	<a href="#">Link</a>

### PRODUCT INFO

<b>Trunk weight:</b>	2.73 Kg
<b>Packaging:</b>	Drum
<b>Customs code:</b>	85367000
<b>Packaging dimensions:</b>	486x486x486 mm

