




LSZH DCA
GGM F02BG6A1RL

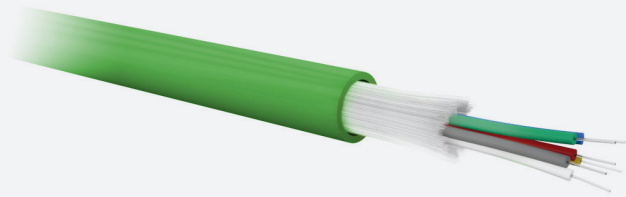

*2FO G657A1 indoor/outdoor tight buffer cable
with WB glass yarns*
LSZH DCA

FEATURES

Cable type :	900 µm Tight buffer
Jacket :	LSOH
Euroclass :	Dca-s1, d1, a2
Outer sheath marking :	Metric (xxxx m) gigamedia 2fo g657a1 9/125 tbw lszh dca s1 d1 a2 tb fo cable tbw002a batch number week/year
Fiber amount :	2
Strength member :	: Glass yarns protection against rodent
Fibre count :	2
Structure :	Tight buffer
Fibre optic category :	Single mode 9/125
Category :	Other
Strain relief :	No
Armed :	No
Rodent protected :	Yes
Jacket type :	Other
Specification material outer sheath :	Other
Jacket colour :	Green
Longitudinal water blocking cable :	Yes
Radial water blocking cable :	Yes
Metal free cable :	Yes
Reaction-to-fire class according to EN 13501-6 :	Dca
Smoke development class according to EN 13501-6 :	s1
Euro class flaming droplets/particles according to EN 13501-6 :	d1
Euro class acidity according to EN 13501-6 :	a2

Halogen free acc. IEC 60754-1/2 :	Yes
Fire retardant :	No
Low smoke acc. IEC 61034-2 :	Yes
Oil resistant :	No
Resistant to chemicals :	No
UV resistant :	Yes
Cable OD :	5.8 mm
Min. permitted bending radius, stationary application/permanent installation :	58 mm
Max. tensile strength during installation :	5 kN
Suitable for underground installation :	No
Blowed cable :	No
Cable geometry :	Round
Weight :	28 kg/km

PART NUMBER	DESCRIPTION
GGM F02BG6A1RL	2FO G657A1 indoor/outdoor tight buffer cable with WB glass yarns, LSZH DCA