




## IP active loudspeaker housing kit + an 8 ohm passive housing 2 x 10W GGM IPABW10

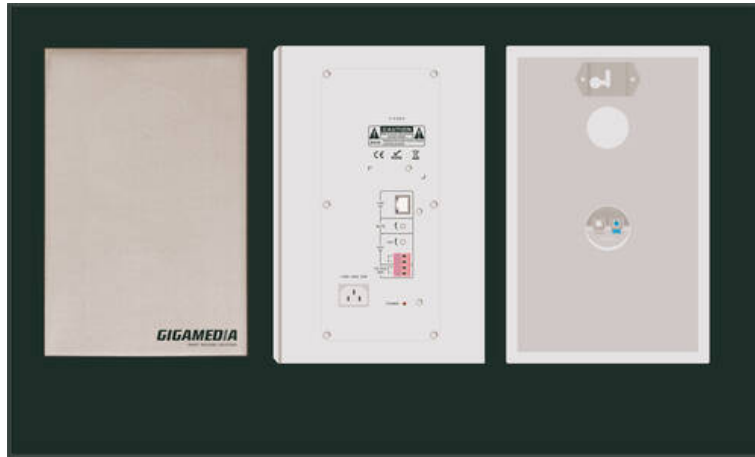

This kit includes 2 housings. The first is an active IP loudspeaker enclosure. The second is a passive enclosure connected to the first enclosure via a dedicated port. This type of solution is mainly used in classrooms or meeting halls. They provide quality sound for your presentations. This solution has an RJ45 input to recuperate the data coming from the network as well as alarm messages. The master enclosure comprises a decoder integrating an ultra-rapid DSP allowing start-up in less than 1 second. This product supports all IP networks. Easy to install and configure, this product will be an important feature for your IP sound systems.

### Product features

- Transmission rate : 10/100mbps
- Bitrate : 8k - 512kbps
- Distortion :
- Network interface : RJ 45
- Protocols : Tcp/ip, udp, igmp
- Sampling : 8khz-48khz
- Audio format : Mp3
- Audio mode : 16 bit cd quality

### Article features

- Continuous recording : 150 Hz~16 KHz +1/- 3dB
- Power Consumption : 68 db
- Power supply : 220 VAC on active speaker

### ETIM 10 features

- Model : Surround system
- Number of loudspeaker components : 2
- Subwoofer : Passive
- Wireless : No
- Music power front loudspeaker : 10 W
- Music power rear loudspeaker : 10 W
- Colour : Black