



## STANDARD BULLET IP CAMERA

### GGM IPSB4VM2DL



#### Standard Range

This high-performance camera from the «Standard» series is ideal for site security projects, in the tertiary sector, retail, administrative buildings, etc.

#### FEATURES

<b>Software :</b>	5.2.3
<b>Model Type :</b>	Bullet
<b>Chipset :</b>	Novatek
<b>Image sensor :</b>	1/3" CMOS
<b>Image size :</b>	2560×1440
<b>Electronic shutter :</b>	1/1s ~ 1 / 100000s
<b>Iris Type :</b>	Fixed Iris
<b>Minimum illumination :</b>	0.004 lux @F1.4, AGC ON; 0 lux with illumination on
<b>Lens :</b>	2.8-12 mm@F1.4
<b>Focus :</b>	Motorized
<b>Lens Mount :</b>	Ø 14
<b>Field of view H/V/D :</b>	H.FoV: 92 °~31 ° ; V.FoV: 48 °~17.2° ; D.FoV: 112 °~ 35.6 °
<b>Day &amp; Night :</b>	Auto
<b>WDR (wide dynamic range) :</b>	120dB
<b>BLC :</b>	Yes
<b>HLC :</b>	Yes
<b>Defog :</b>	No
<b>S/N ratio :</b>	≥50dB
<b>Digital NR :</b>	3D DNR
<b>EIS :</b>	No
<b>Angle ajustement :</b>	Pan: 0°~360° ; Tilt:0°~90° ; Rotation: 0°~360°

## PICTURE

<b>Video compression :</b>	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264/ MJPEG
<b>H265 Compression standard :</b>	H.265 Compression Standard: Main Profile@Leve4.1 High Tier
<b>Privacy mask :</b>	4 mask
<b>Main stream :</b>	4MP/3MP/1080P/720P (60Hz: 1~30fps; 50Hz: 1~25fps)
<b>Sub Stream :</b>	720P/D1/VGA/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
<b>Third stream :</b>	D1/480× 240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
<b>Bitrate :</b>	64 Kbps ~12Mbps
<b>Bit rate Type :</b>	VBR / CBR
<b>Audio Compression :</b>	G711A/U
<b>Image settings :</b>	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
<b>Corridor mode :</b>	Yes
<b>ROI :</b>	Each ROI to be configured separately

## INTERFACES

<b>Network :</b>	RJ 45
<b>Surge Protection :</b>	Differential Mode±2KV, Common Mode±4KV
<b>Video Output :</b>	No
<b>Number of audio in :</b>	1
<b>Number of audio out :</b>	0
<b>Buit-in speaker :</b>	/
<b>Built-in microphone :</b>	1CH built-in MIC
<b>Storage :</b>	Network remote storage; micro SD card storage up to 256 Gb
<b>Reset :</b>	Yes
<b>Alarm in :</b>	/
<b>Alarm out :</b>	/

## ANALYTICS

<b>Smart Event :</b>	Line crossing/region intrusion (human/vehicle classification), abandoned/missing object detection
<b>Statistics :</b>	/
<b>Exception detection :</b>	video exception
<b>Face detection :</b>	/
<b>Video Metadata :</b>	/

## DORI (BASED ON 2.8mm/2.8-12mm)

<b>Detect :</b>	W: 64m(210ft) ; T: 189m(619ft)
<b>Observe :</b>	W: 26m(84ft) ; T: 75m(247ft)
<b>Recognize :</b>	W: 13m(42ft) ; T: 38m(124ft)
<b>Identify :</b>	W: 6m(20ft) ; T: 19m(62ft)

## FUNCTIONS

<b>Remote monitoring :</b>	Web browser /TVT NVR/GGM CENTRAL/GGM WATCH
<b>Web browser :</b>	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
<b>Online connection :</b>	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
<b>Network protocol :</b>	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTPS, HTTP POST, P2P, QoS
<b>Onvif version/Profile :</b>	ONVIF 24.06/M, T, S, G
<b>Smart Alarm :</b>	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception
<b>General function :</b>	Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, corridor pattern
<b>Security :</b>	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
<b>POE :</b>	Yes (IEEE802.3 af)
<b>IR distance :</b>	30 ~ 50 m
<b>Warm led distance :</b>	30 ~ 40 m
<b>IP protection rate :</b>	IP67
<b>IK protection rate :</b>	/


## OTHERS

<b>Power supply :</b>	DC12V/PoE
<b>Power consumption :</b>	< 8.5W
<b>Storage conditions :</b>	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
<b>Operating conditions :</b>	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
<b>Dimension :</b>	218.1 x x 79.5 70.4
<b>Weight :</b>	Approx. 0.684KG
<b>Installation :</b>	Ceiling mounting; wall mounting
<b>Certificate :</b>	CE, FCC
<b>Environmental protection :</b>	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

## PART-NUMBER

PART-NUMBER	DESCRIPTION
<b>GGM IPSB4VM2DL</b>	Standard Bullet series Res 4MP Lens 2.8-12mm IR:50m WL:40m IA IP67 ONVIF NDAA

DIMENSIONS FOR GGM IPSB4VM2DL

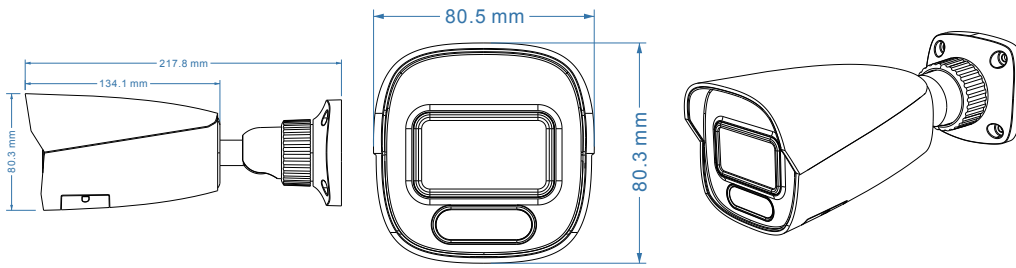

ACCESSORIES FOR GGM IPSB4VM2DL



GGM AJB009



GGM AJB009+GGM ACMB001



GGM AJB009+GGM APMB001



GGM AJB009+GGM ATMB002