




## ST FAST field installable 900µm multimode OM3 connector + assembly tool, no epoxy/no polishing, ceramic ferule

### GGM STFASTOM3

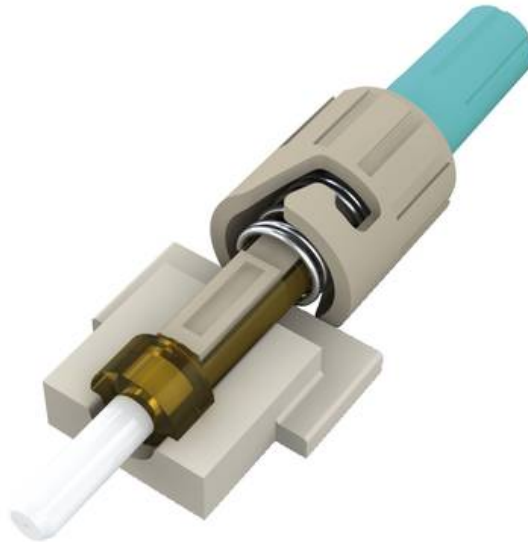

The GIGAMEDIA ST FAST pre-bundled fibre connectors offer optimal efficiency during fibre optic deployment. They reduce implementation time thanks to a connection technology without glue or polishing.

- Factory-terminated for optimized performance
- Fibre diameter: 900 µm
- Housing/boot color: grey housing & aqua boot
- Boot: suitable for 900 µm fibre, white color
- Fibre conformity: IEC 60793-2-10 A1
- Insertion loss: 0.3 dB typical / 0.5 dB max
- Return loss:  $\geq 45$  dB
- Matings: 500 ( $\leq 0.1$  dB typical change)
- Tensile strength: 4 N (900 µm)
- Operating temperature: -40 °C to +75 °C
- Individual packaging