




6 core OM3 tight buffer Cable assembly, LC/LC 40m Cca, acqua (coil)

GGM 6TBM3LCLCH040

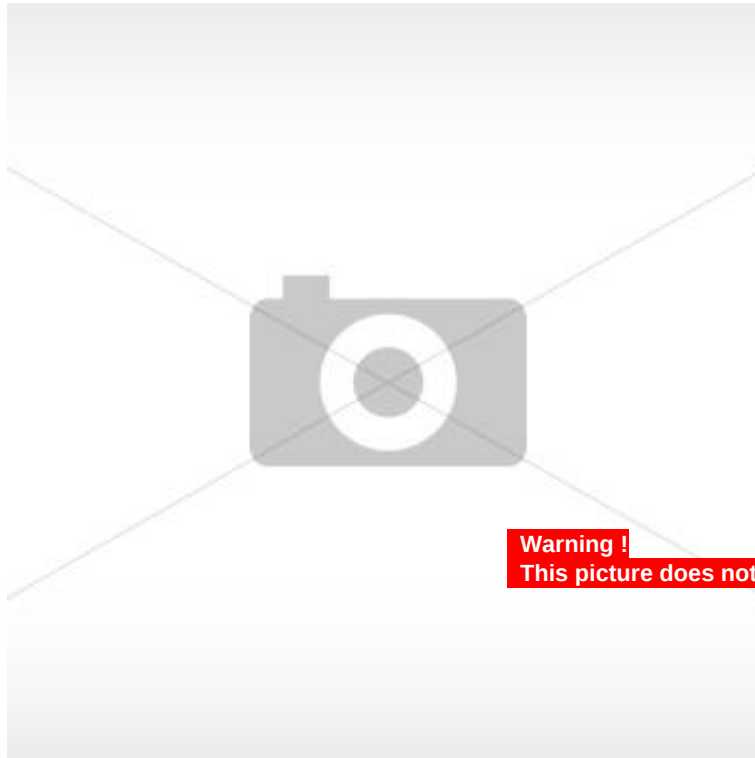

Warning !
This picture does not show the exact color

The Pre Terminated Fiber solution by Gigamedia allows time and cost saving for your link in smart building, industrial, residential or data center market.

Choose our cable assembly solution made in our own workshops is :

- 70% **time saving**
- A **fast delivery**
- A **guarantee of a well connection with the right sustainable connectors**
- Cost **saving** and prices controlled
- A full traceability
- Shortest **installation**
- Test reports **available** online by QR code flashing
- A Des **factory quality connection**
- A "**on demand**" production
- Less **risk on site**
- The **last norms testing** with our high precision machine
- A wide range of **cables and connectors**, including the last Euroclass

Product features

- Applications : Intra & inter-building connections, data centers
- Connectors : SC
- Fixing : Pg13.5 cable gland + lock nut
- Included : User guide, individual insertion loss (IL) test
- Installation : Interior Exterior
- Reinforcement : Glass yarns
- Jacket : LSOH
- Cable type : 900 µm Tight buffer
- Fiber type : Multimode OM3

ETIM 10 features



- Category : OM3
- Connector connection 1 : Other
- Number of connectors connection 1 : 6
- Connector connection 2 : Other
- Number of connectors connection 2 : 6
- Number of fibres : 6
- Length : 40 m
- Cable type connector connection 2 : Universal cable
- With rodent protection : Yes
- Crossed : No
- Colour outer sheath : Turquoise
- Flame retardant : According to IEC/EN 60332-3-24
- Halogen free according to EN IEC 60754-1 : Yes
- Halogen free according to EN IEC 60754-2 : Yes
- Halogen free according to EN IEC 60754-3 : No
- With pulling eye : Yes