





## GGM 6TBM3LCLCH050

6 core T.B. 900μ OM3 LC/LC Cca 50m trunk cable assembly

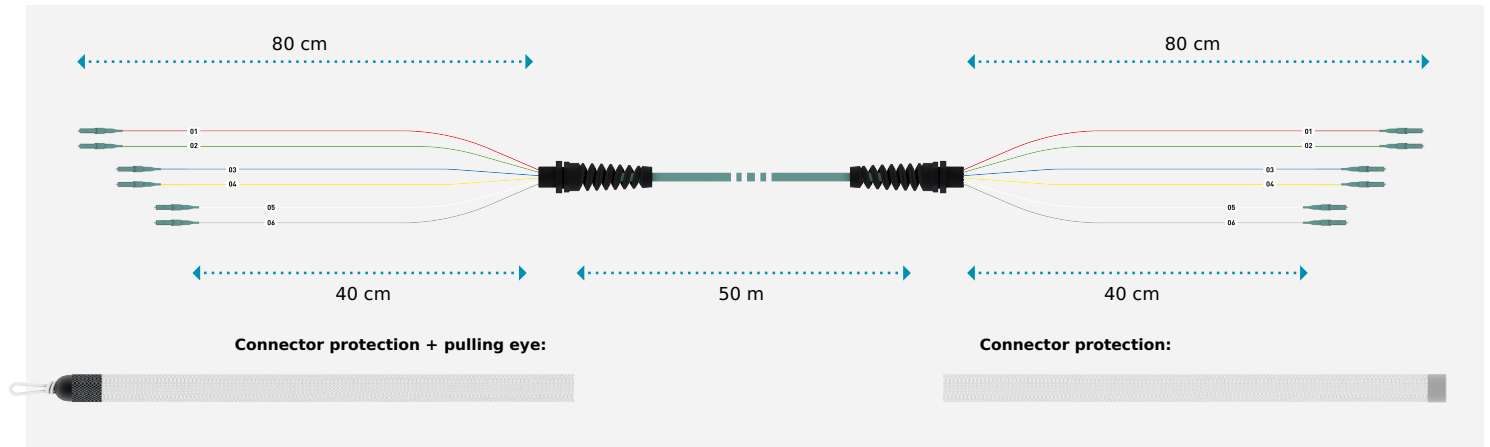

### END A (pulling eye)

|                                |       |
|--------------------------------|-------|
| <b>Connector:</b>              | LC    |
| <b>Breakout length:</b>        |       |
| <b>Min. (last fiber):</b>      | 40 cm |
| <b>Max. (fiber N°1):</b>       | 80 cm |
| <b>Connectors' staggering:</b> | par 2 |



#### Connector performances


|                            |         |
|----------------------------|---------|
| <b>Max. I.L.:</b>          | 0.25 dB |
| <b>Typical I.L.:</b>       | 0.15 dB |
| <b>Return loss (R.L.):</b> | >30dB   |

#### Connector protection

|                               |                              |
|-------------------------------|------------------------------|
| <b>Pulling eye:</b>           | Ø 28 mm / (transparent PVC)  |
| <b>+ Spiraled cable gland</b> |                              |
| <b>Tensile strength:</b>      | 700 N                        |
| <b>Fastening type:</b>        | Presse-étoupe spiralé PG13,5 |

### END B

|                                |       |
|--------------------------------|-------|
| <b>Connector:</b>              | LC    |
| <b>Breakout length:</b>        |       |
| <b>Min. (last fiber):</b>      | 40 cm |
| <b>Max. (fiber N°1):</b>       | 80 cm |
| <b>Connectors' staggering:</b> | par 2 |



#### Connector performances

|                            |         |
|----------------------------|---------|
| <b>Max. I.L.:</b>          | 0.25 dB |
| <b>Typical I.L.:</b>       | 0.15 dB |
| <b>Return loss (R.L.):</b> | >30dB   |

#### Connector protection

|                               |                              |
|-------------------------------|------------------------------|
| <b>Pulling eye:</b>           | Ø 28 mm / (transparent PVC)  |
| <b>+ Spiraled cable gland</b> |                              |
| <b>Fastening type:</b>        | Presse-étoupe spiralé PG13,5 |

### CABLE

|                                    |                                |
|------------------------------------|--------------------------------|
| <b>Part number:</b>                | GGM FO6B3FRST                  |
| <b>Description:</b>                | 6FO INTEX OM3 TIGHT MDV ZH CCA |
| <b>Strength member:</b>            | glass yarns rodent protection  |
| <b>Sheath:</b>                     | LSOH                           |
| <b>sheath color:</b>               | Turquoise                      |
| <b>Euroclass / fire behaviour:</b> | Cca                            |
| <b>Cable datasheet:</b>            | <a href="#">Link</a>           |
| <b>DOP cable:</b>                  | <a href="#">Link</a>           |

### PRODUCT INFO

|                              |                |
|------------------------------|----------------|
| <b>Trunk weight:</b>         | 3.75 Kg        |
| <b>Packaging:</b>            | Coil           |
| <b>Customs code:</b>         | 85367000       |
| <b>Packaging dimensions:</b> | 486x486x150 mm |

