




LC/UPC to SC/APC singlemode OS2 9/125 simplex patchcord, 2 meters, Ø 2mm yellow jacket, ceramic ferule

GGM SPS2SCALC2M

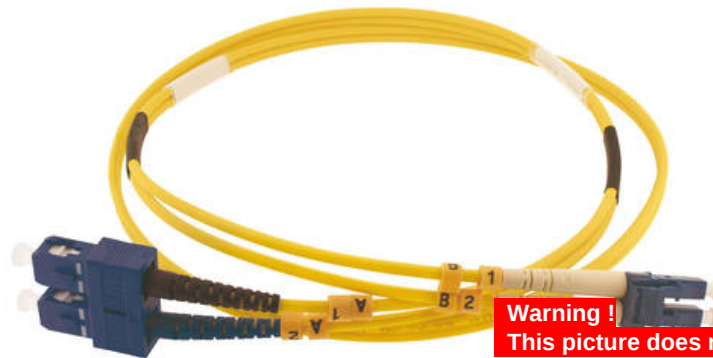

Warning !
This picture does not show the exact color

Simplex patch cord OS2 9/125 µm, yellow sheath, 2 mm diameter

Product features

- Cord type : Duplex
- Ferule : High precision ceramic (ZrO₂)
- Sheath type : LSZH
- Reinforcement : Aramid yarns
- Cable diameter : 2x 3 mm (multimode), 2x 2.80 mm (singlemode), 2x 1.80 mm (LC to LC)
- Conformity : EIA/TIA 568, ISO 11801, EN50173, IEC 61754, IEC 61300
- Packaging : Each
- Other lengths and configurations : On demand
- Il/rI test report : Supplied with each piece
- Operating temperature : From - 5°C to + 60°C
- Mating cycles : 1000 (0.2 db change)

Article features

- Polishing type : UPC (LC) & APC 8° (SC)

ETIM 10 features

- Fibre type : Single mode
- Category : OS2
- Number of fibres : 1
- Outer diameter sheath single fibre : 2 mm
- Cable type : Simplex
- Length : 2 m
- Type of connector connection 1 : LC
- Type of connector connection 2 : SC
- APC-version connection 1 : No
- APC-version connection 2 : Yes
- Colour outer sheath : Yellow
- Anti-kink sleeve : Put-on



- Halogen free according to EN IEC 60754-1 : Yes