




**Category 6A 4 Pairs AWG23 U/UTP SLIM LSOH-FR Cca s1a a1 d1 6,8 mm,
White (305 m Reel In Box)**

GGM C6AU4PSFRTU3

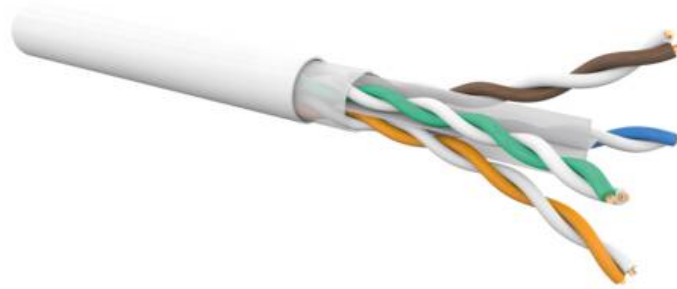

This series of cables meets and exceeds the requirement of Category 6A and ISO 11801 or EN 50173 Class EA when associated with GIGAMEDIA High Performance RJ45 jacks. It is the ideal solution when deploying 10Gbit/s capable Network cabling Infrastructure. It is also backward compatible with relevant application standards such as 1000BASE-T and other applications. The user is guaranteed to use a CAT6A component cable that also has a high level of Fire performance: LSZH & Fire retardant in accordance with IEC 60332-3 & EN 50267 to meet latest European regulation (CPR)

- Applications : IEEE802.3 : 10GBase-T, 5GBase-T, 2.5GBase-T, 1000Base-T, 100Base-Tx, 10Base-T, IEEE 802.3af/at/bt (PoE/PoE+/4PPoE)
- Shielding : U/UTP
- Category : 6A
- Standards : ANSI/TIA-568.2-D ; EN 50173 ; ISO/IEC 11801
- Frequency range : From 0 to 500 Mhz
- Impedance : 100
- Gauge (awg) : 23
- Conductor type : Solid copper
- Number of pairs : 1X4
- Jacket type : LSZH-FR
- Outer jacket colour : White
- Jacket RAL : RAL 9001
- Outer sheath diameter (mm) : 6.8
- NVP (%) : 67
- Insulation diameter (mm) : 1.13
- Marking : GIGAMEDIA EN 50173 CAT6A U/UTP LSZH-FR -C6AU4PSFR -TP050A - Cca NVP 67% 4PAIR 23 AWG [lot n°] XXXXXX m
- Packaging : 305 m reel-in-box