




FIBER OPTIC LAUNCH CUBES


GGM OFLxxx

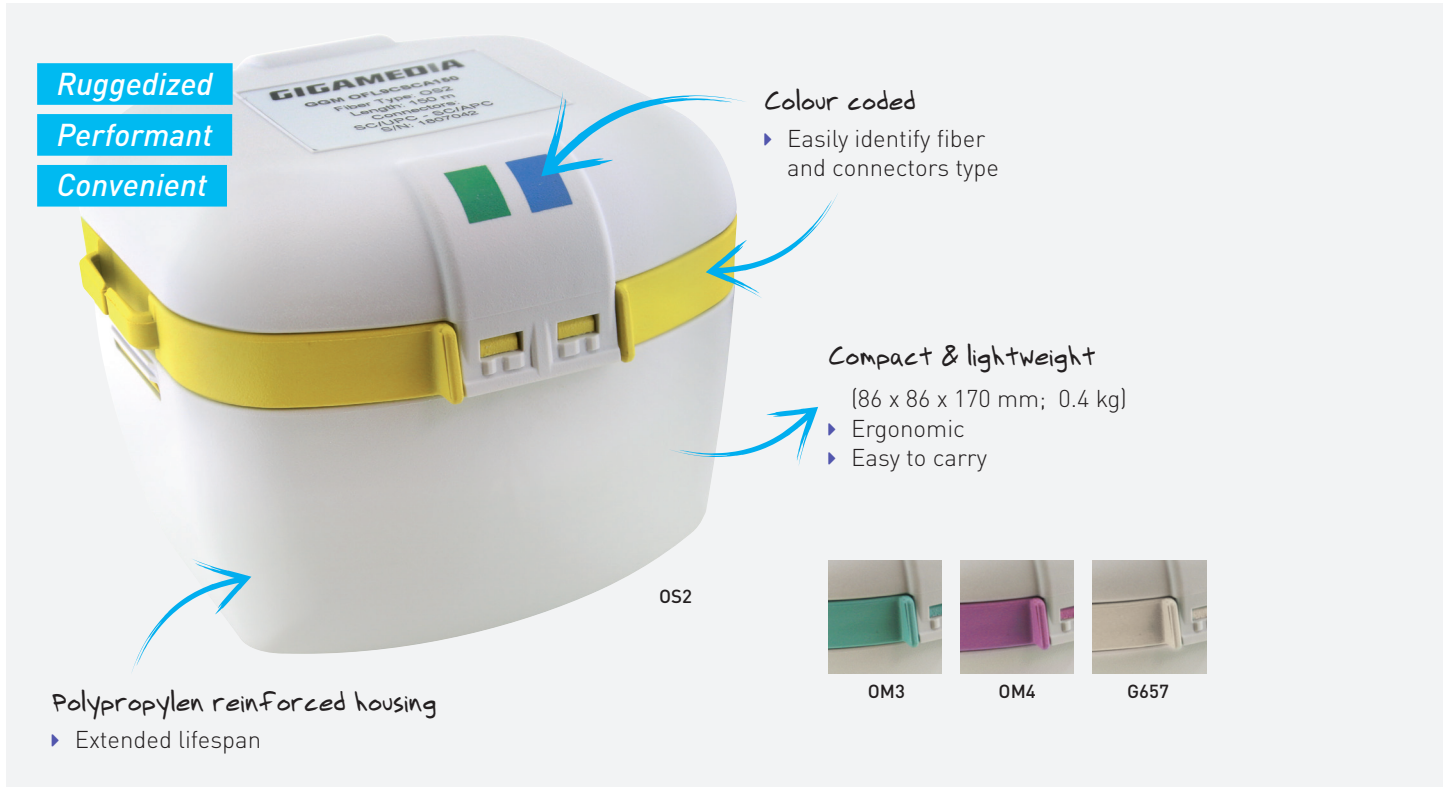

Fiber optic launch cables are essential when proceeding to OTDR tests.

They will enable you to measure the loss of the near and far-end connectors on the fiber link by eliminating the dead-end zone of the reflectometer.

Perform your tests easily and comfortably with GIGAMEDIA's OFL launch cables.

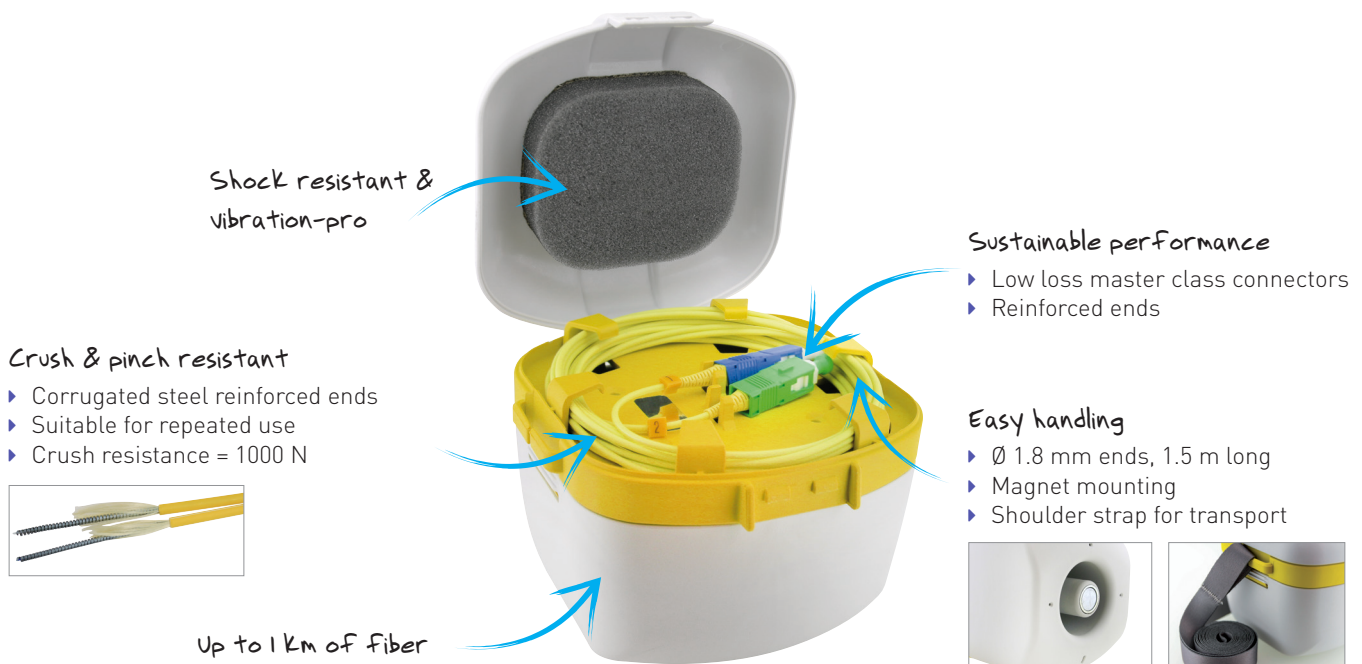


TECHNICAL SPECIFICATIONS

Dimensions (width x height)	107 x 86 mm
Max insertion loss @ 1310 nm @ 1550 nm @ 850 nm @ 1300 nm	≤ 0.35 dB/km ≤ 0.22 dB/km ≤ 2.50 dB/km ≤ 0.70 dB/km
Connectors max IL Singlemode Multimode	≤ 0.10 dB ≤ 0.15 dB
Return loss APC UPC PC	≥ 65 dB ≥ 55 dB ≥ 35 dB
Temperature range	-40 °C to +55 °C
Ends lenght	1.5 m



Test report included

- ▶ Insertion loss
- ▶ Return loss
- ▶ Interferometry (3D)



Multimode

		ST-SC	SC-SC	SC-LC
OM3	150 m	GGM OFL3TC150	GGM OFL3CC150	GGM OFL3CLC150
OM4	150 m	GGM OFL4TC150	GGM OFL4CC150	GGM OFL4CLC150

Singlemode

		ST/UPC-SC/UPC	SC/UPC-SC/UPC	SC/UPC-LC/UPC	SC/UPC-SC/APC	LC/UPC-SC/APC	SC/APC-SC/APC
OS2	150 m	GGM OFL9TC150	GGM OFL9CC150	GGM OFL9CLC150	GGM OFL9CSCA150	GGM OFL9LCSCA150	GGM OFL9SCASCA150
G652D	500 m	GGM OFL9TC500	GGM OFL9CC500	GGM OFL9CLC500	GGM OFL9CSCA500	GGM OFL9LCSCA500	GGM OFL9SCASCA500
G657A2	500 m	-	-	-	-	-	GGM OFL6SCASCA500

RELATED ITEMS



P/N	DESCRIPTION
GGM ONECLICKSC	Fiber optic cleaning pen for SC,ST or FC 2.5 mm connector end-face loaded
GGM ONECLICKLC	Fiber optic cleaning pen for LC 1.25 mm connector end-face loaded
GGM CLETOPS	Cleaning tool for fiber optic connectors
GGM CLEANKIT	Fiber optic cleaning kit (ST/SC/LC cleaning pens, Cletops cassette, VFL)
GGM CLEANKIT2	Fiber optic cleaning kit (wipes, tabs, Eliminator fluid, cube)