
Telephone panel 30 ports RJ45 CAT3 UTP 1U green (3.6; 4.5)

GGM CH30PVPPC3

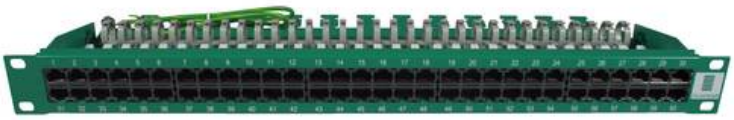

Backbone cabling for telephone networks not requiring performance category 6 or 5e connections. High density Category 3 panels are ideal for this type of use. With 60 ports available in a useful height of 1U, it provides high density cabling and space saving in the switching panel. The GIGAMEDIA offer comprises two references corresponding to two distinct connection conventions: one in 3/6 4/5 and the other in 4/5 7/8 (France Telecom).

- Category : 3
- Color code : 3/6, 4/5
- Standards : ANSI/TIA-568.2-D, ; EN 50173 ; ISO/IEC 11801
- Connector type : Female
- Height in U : 1
- Impedance : 100
- Connection mode : 110/LSA+ blocs
- Port identification : Numbered ports
- Number of connections : 30
- Shielded : No
- Connection type : 110
- Height (U) : 1
- Colour : Other
- RAL : 6010
- Mounting method : 482.6 mm (19 inch) mounting
- Height : 44.45 mm
- Width : 482.6 mm
- Depth : 170 mm
- Compatible with Grade2TV according to XP-C 90-483 : No
- Compatible with Grade3TV according to XP-C 90-483 : No