GIGAMEDIA
SMART BUILDING SOLUTIONS


PDU XP 1 PHASE 32 A / 230 V / 7.2 KW – 12 X C13 (10 A) / 12 X C19 (16 A) EQUIPPED WITH HO5VVF 3 m POWER CORD WITH IEC60309 PLUG BASIC

GGM XP1321212C360309BN

TECHNOLOGY: **BASIC**

Reliable energy distribution

Neat and clean Power distribution in racks

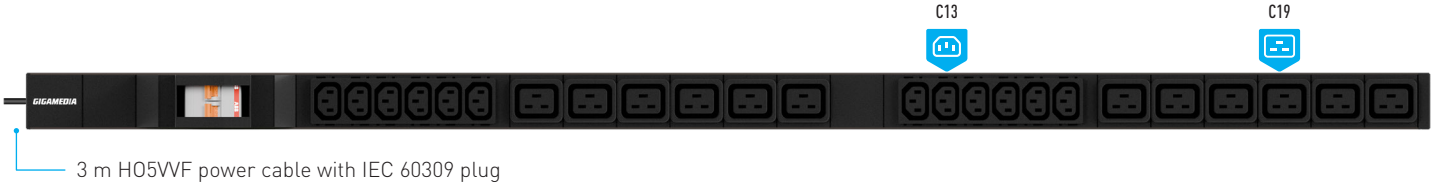

3 m HO5VVF power cable with IEC 60309 plug

- Operating temperature: -5 °C to +50 °C
- Aluminium profil
- Supplied with mounting brackets
- Dimensions (L x W x H): 1120 x 45 x 50 mm
- Color: black
- Compliant with standards:
  2014/35/EU (Low Voltage Directive)
  2011/65/EU amended by 2015/863/EU (RoHS)
  2014/30/EU (EMC / Electromagnetic Compatibility)