

GGM NVRL0104P GGM NVRL0108P

NUMERIC VIDEO RECORDER 1 HDD
4 x POE (GGM NVRL0104P)
8 x POE (GGM NVRL0108P)

H265 / H264

4/8 POE RJ45 Ports

4K recording resolution

P2P / UPNP

40/60 Mbps bandwidth

6 To max HDD



GGM NVRL0104P



GGM NVRL0108P




GIGAMEDIA NVR provides an excellent ratio price/performance for your security installation. The NVRL0104P / 08P are dedicated for small security installation.

4 or 8 PoE port can be used to power camera directly.

You can add 1 HDD with maximum capacity of 6 Tb. Recording resolution can support up to 4K. It embed 4/8 dry contact input for recording on alarm.

MAIN MENU

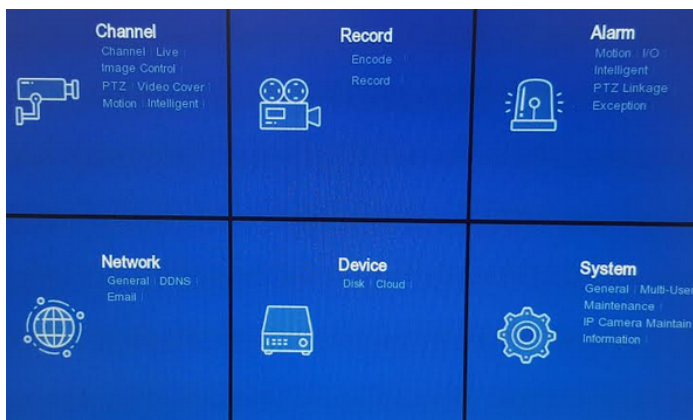

FEATURES:

System	
OS	Linux
CPU	ARM processor
Flash	NAND 128Mb
RAM	4/8 Gb
Live display	GGM NVL0104P: 1x1;2x2 GGM NVL0108P: 1x1;2x2;3x3;3x4;4x4;1+5;1+7 +8;1+9;1+12;4+9;1+1+12
Video OUT	HDMI x 1
Display Resolution	1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080, 2560*1440, 3840*2160
Dewarp Fisheye	Not supported
Streams	Main / Second
PTZ functions	Control direction, Preset, patrol, Iris
Display	On Screen Display (OSD) NVR & Caméras
Video	
Format	H265, H264, MJPEG
Decoding resolution	8MP (4K), 5MP, 3MP, 2MP(1080P), 1.3MP(960P), 1.0MP(720P)
Decoding capacity	1 Channel real-time @ 4K / 5MP 2 Channels real-time @ 4MP 3 Channels real-time @ 3MP 4 Channels real-time @ 2MP
SPOT Function	No
Audio	
Format	G.711
IN/OUT	1 IN and 1 OUT Jack 3.5
System Administration	
Cameras integration	Onvif V2.6 profile S
Events	Motion detection, PIR, alarme IN, occlusion, sound
Action	Recording, email, FTP, buzzer, notification Cloud
Users / profil	admin / user
Log	System, recording, user, error
Time	Time zone, manual, synchro auto, summer time
Language	EN/FR/CN/PT/ES/SW ect

Recording	
Time recording	Pre record 10s, post record 30s, 1min, 2 min, 5min
Streams amount	2 / camera
Input Bandwidth	GGM NVRL0104P: 40Mbps GGM NVRL0108P: 60Mbps
Recording type	Continu, manual, planned, motion detection, PIR, smart functions
Storage	
Number of HDD	1
HDD Max capacity	8 To
RAID	/
Playback	
Display	GGM NVRE0104P: 4 channels GGM NVRE0108P: 8 channels
Control	Play, Stop, Pause, Next Image, speed, calendar
Video search	Alarm, event, picture, calendrier, time, smart functions
Screenshot format	.jpg / .jpeg
Video export format	.avi, .rf, .mp4
Network	
Interface	RJ45 10/100/1000 Mbps
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP,
Interface	
USB	USB 2.0 x 2
Alarm IN	4/8
Alarm OUT	1
RS485	No
Remote acces	
Software	Surveillance Client
Mobile App	GGM View
Browser	IE, Firefox
General	
Power supply	110-220 VAC, POE Switch 802.3 AT
Dimensions	300x227x53 mm
Weight	1.8Kg
Consumtion	<12W sans POE
Working temperature	10-55°C
Smart functions	
Advanced functions	Périmetric Cross line detection Stationnary object Pedestrian Face detection Counting