




## 8 I/O EXTENSION MODULE GGM AXCEXTIO

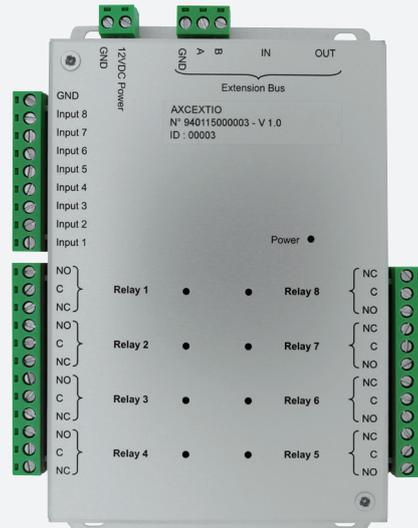

### EXTENSION 8 I/O PR AXC2IP

The GGM AXCEXTIO allows 8 inputs / 8 outputs to be added to the installation allowing you to operate programmable controllers depending on events signalled by the access control software. A RS485 is used for connection to the controller and may also be connected to an AXC4DEXTEVO. It is possible to connect up to 10 AXCEXTIO per controller.

#### FEATURES

<b>Connection to the controller :</b>	Rs 485 2 wires
<b>Relay outputs (integrated LEDs independent) :</b>	8
<b>Two or four state inputs :</b>	8
<b>Standalone :</b>	No
<b>Networkable :</b>	Yes
<b>PC-binding :</b>	No
<b>Max. number of doors :</b>	8
<b>Type of interface :</b>	Bus system
<b>Max. number of persons :</b>	15000
<b>Reading strategy :</b>	Other
<b>Signalling :</b>	Other
<b>Mounting method :</b>	Surface mounted (plaster)
<b>Operating voltage at DC :</b>	09 - 14
<b>Operation temperature :</b>	-20 - 50
<b>IP protection :</b>	IP20

**Width :** 108 mm

**Height :** 157 mm

**Depth :** 30 mm

**PART-NUMBER**

**DESCRIPTION**

**GGM AXCEXTIO**

EXTENSION 8 IO PR AXC2IP