





IP68 LC DUPLEX WATERPROOF RECEPTACLES

GGM IP68RACLCxx

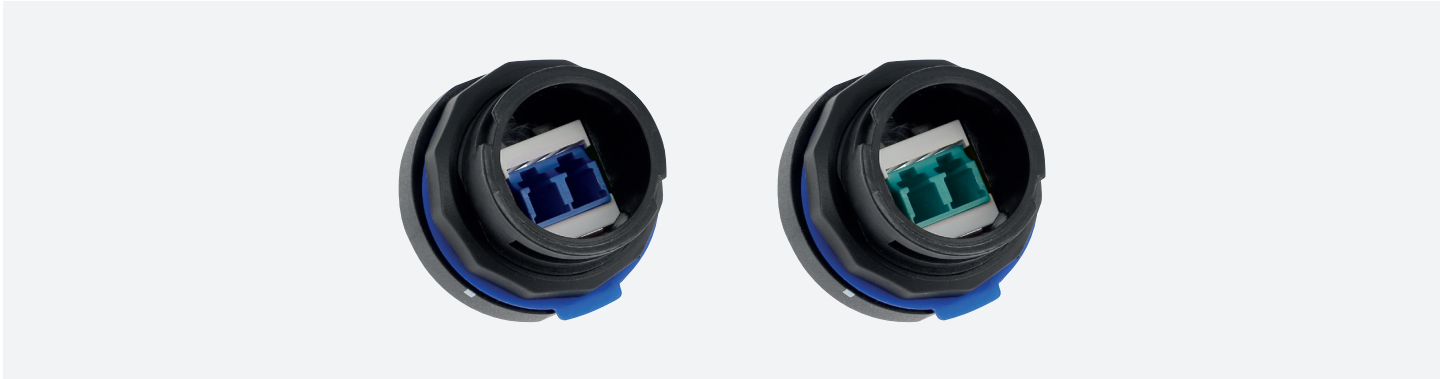

Recommended cutout:

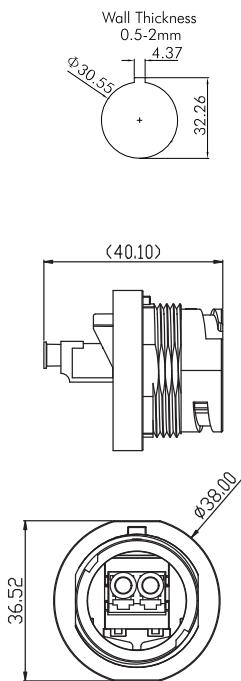

Dedicated to heavy-duty and harsh-environment applications, IP68 Gigamedia receptacles offer a strong protection against dust, moisture, vibration or liquid projections.

They are available in LC duplex, multimode OM3 or singlemode OS2 versions.

FEATURES

- ▶ ABS plastic housing
- ▶ IP68 protection (IEC 60529)
- ▶ LC duplex adapters with ceramic sleeve
- ▶ Multimode OM3 (aqua color) or singlemode OS2 (yellow color) adaptor
- ▶ Operating temperature: -20 °C to +60 °C
- ▶ IL max: 0.3 dB
- ▶ Mating cycles: >500 (variation 0.2 dB)
- ▶ Bayonet locking mechanism
- ▶ Housing: IEC 61076-3-106 variant 01 style 2
- ▶ Suitable for GGM IP68Mxx & GGM IP68Sxx patchcords
- ▶ Optional: IP68 protective cover (GGM IP68CAPRAC)

P/N	DESCRIPTION
GGM IP68RACLMM	IP68 receptacle loaded with multimode OM3 LC duplex adapter
GGM IP68RACLCSM	IP68 receptacle loaded with singlemode OS2 LC duplex adapter

ACCESSORIES

P/N	DESCRIPTION	
GGM IP68M3LC1M	IP68/LC to LC duplex multimode OM3 patchcord, aqua color	1 m
GGM IP68M3LC2M	IP68/LC to LC duplex multimode OM3 patchcord, aqua color	2 m
GGM IP68S2LC1M	IP68/LC to LC duplex singlemode OS2 patchcord, yellow color	1 m
GGM IP68S2LC2M	IP68/LC to LC duplex singlemode OS2 patchcord, yellow color	2 m
GGM IP68CAPRAC	IP68 protective cover for GGM IP68RACLCxM receptacle	
GGM IP68XTDLCMM	Multimode OM3 IP68 LC duplex in-line coupler	
GGM IP68XTDLCSM	Singlemode OS2 IP68 LC duplex in-line coupler	

GGM IP68S2LC2M



GGM IP68XTDLCSM