




**FTTH simplex singlemode G657A2 SC/APC-SC/APC 12 m subscriber patchcord, Ø 2mm, ivory colour, bend insensitive fiber**

**GGM JSG657SCA12M**

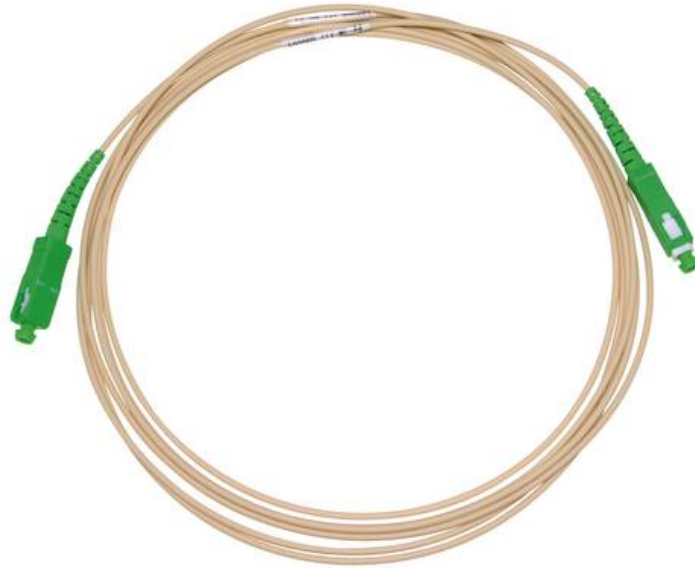

The subscriber patch cords allow the terminal socket to be connected to the subscriber's box.

#### Product features

- Cord type : Simplex
- Fiber type : Singlemode G657A2
- Reinforcement : Aramid yarns
- Outersheath diameter : 2
- Sheath type : LSZH
- Jacket color : Ivory
- Il/rl test report : Supplied with each piece
- Insertion loss :  $\leq 0.15\text{db}$
- Mating cycles : 1000 (0.2 db change)
- Operating temperature : From - 5°C to + 60°C

#### Article features

- Polishing type : Apc
- Typical return loss :  $\geq 65\text{ dB}$

#### ETIM 10 features

- Fibre type : Single mode
- Category : Other
- Fibre standard according to ITU-T : G.657.A2
- Number of fibres : 1
- Outer diameter sheath single fibre : 2 mm
- Cable type : Simplex
- Length : 12 m
- Type of connector connection 1 : SC
- Type of connector connection 2 : SC
- APC-version connection 1 : Yes
- APC-version connection 2 : Yes
- Colour outer sheath : White
- Anti-kink sleeve : Put-on
- Halogen free according to EN IEC 60754-1 : Yes